



ELECTRIC DRINKING FOUNTAIN

A481.8 Series

MODEL A481408S

FULLY RECESSED, WALL MOUNTED
ELECTRIC DRINKING FOUNTAIN

STANDARD FEATURES

- 18 gage, 304 stainless steel cabinet
- 16 gage, galvanized mounting frame
- Polished Stainless Steel, anti-rotation, non-squirt bubbler
- Copper tube on stainless steel tank evaporator
- 100 mesh inlet strainer
- Vandal resistant screws



“INDOOR USE ONLY”

SUGGESTED SPECIFICATIONS

Model A481408B is a self-contained, fully recessed pressure electric drinking fountain that shall deliver a minimum of **8.0 GPH** (30.3 LPH) of water at 50°F (10°C) cooled from 80°F (26.7°C) inlet water and 90°F (32.2°C) ambient. Unit shall be activated by a brass, chrome plated front push button using less than 5 pounds of force. Bubbler shall be stainless steel with an integrally designed non-squirt feature and operate on a water pressure range of 20-105 psig. Cabinet panels shall be constructed from 304 stainless steel and the bowl shall have an integral drain. Cooling system shall use R-134a refrigerant and be capillary tube regulated. An adjustable thermostat with an off position shall regulate the refrigeration system. Unit shall be listed by Underwriters Laboratories for both the US and Canada and is compliant to the Air Conditioning and Refrigeration Institute Standard 1010. Unit is certified to ANSI A117.1, Public Law 111-380 (NO-LEAD), CHSC 116875 and NSF/ANSI 61, Section 9.

MODEL:

(Must Specify)

- | | |
|-----------------------------------|-------------------------|
| <input type="checkbox"/> A481408F | Flexible Bubbler |
| <input type="checkbox"/> A481408S | Stainless Steel Bubbler |

OPTIONS

(additional costs may be incurred)

- | | |
|--------------------------------|--------------------------------------------------------------------|
| <input type="checkbox"/> -GF2 | Glass filler |
| <input type="checkbox"/> -WF1 | 1500 gallon capacity, NSF 42+53,
1 micron lead reduction filter |
| <input type="checkbox"/> -220V | 220 volt/50Hz compressor |

Model Number	GPH*	Rated Watts	Full Load Amps	Approx. Shipping Weight
A481408S	8.0	390	4.6	110 lbs.

* GPH of 50°F water at 90°F ambient room temperature and 80°F inlet water temperature
Compressor motor operates on 115 Volt / 60 Hz single phase.

Complies with the following standards:



Test rating conditions are compliant with ARI 1010.



Member of U.S. Green Building Council



Recyclable Product



Water Conserving Product

- ⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
- ⚠ ADVERTENCIA: Cáncer y daño reproductivo - www.P65Warnings.ca.gov

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP INTERNATIONAL




ELECTRIC DRINKING FOUNTAIN

A481.8 Series

MODEL A481408S

FULLY RECESSED, WALL MOUNTED
ELECTRIC DRINKING FOUNTAIN

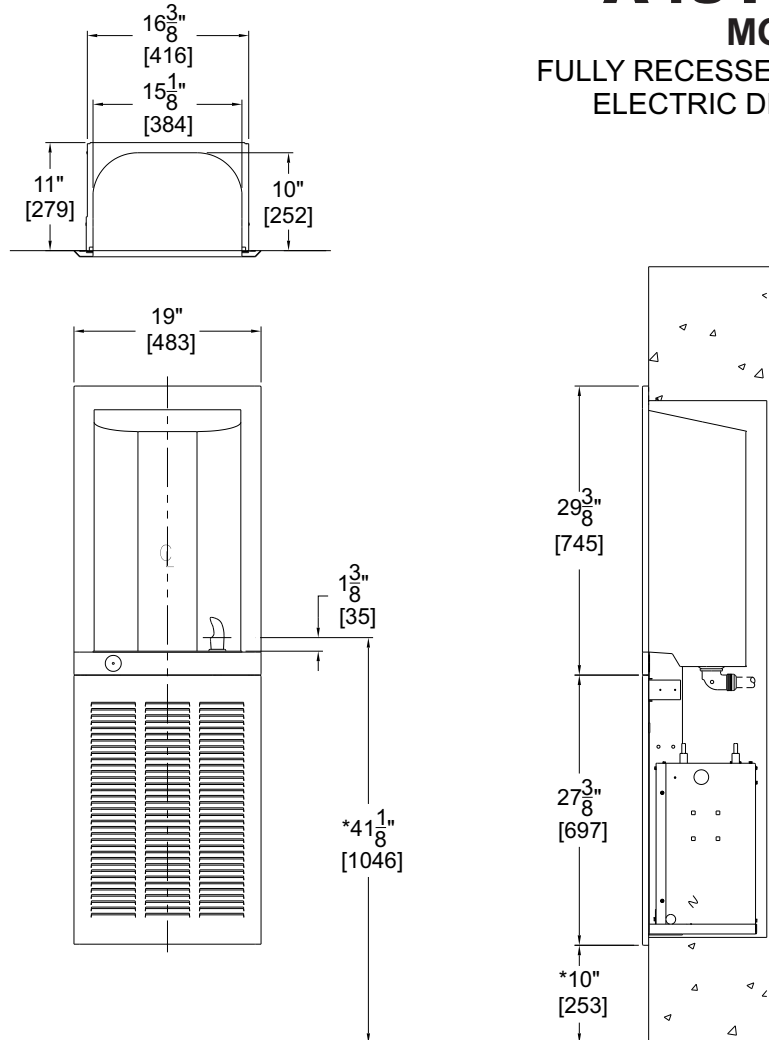

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM]*2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPY WITH FEDERAL, STATE, & LOCAL CODES
3. STOP VALVE NOT PROVIDED

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	Model Number & Options _____	Quantity _____	All dimensions are subject to manufactures tolerance of plus or minus 1/2" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.murdockmfg.com for most current specifications.
	Company _____		
	Contact _____	Title _____	
	Signature (Approval for Manufacturing) _____	Date _____	

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP INTERNATIONAL