SINCE 1853

A481.8 Series

MODEL A481408S FULLY RECESSED, WALL MOUNTED ELECTRIC DRINKING FOUNTAIN

STANDARD FEATURES

- 18 Gauge, 304 Stainless Steel Cabinet
- 16 Gauge, Galvanized or Galvannealed Mounting Frame (A0000000-MF6)
- Polished Stainless Steel, Anti-Rotation, Non-Squirt Bubbler
- Copper Tube on Stainless Steel Tank Evaporator
- 100-Mesh Inlet Strainer
- Vandal Resistant Screws

SUGGESTED SPECIFICATIONS

Model A481408B is a self-contained, fully recessed pressure electric drinking fountain that shall deliver a minimum of 8.0 **GPH** (30.3 LPH) of water at 50°F (10°C) cooled from 80°F (26.7°C) inlet water and 90°F (32.2°C) ambient. Unit shall be activated by a brass, chrome plated front push button using less then 5 pounds of force. Bubbler shall be stainless steel with an integrally designed non-squirt feature and operate on a water pressure range of 20-105 PSIG. Cabinet panels shall be constructed from 304 stainless steel and the bowl shall have an integral drain. Cooling system shall use R-134a refrigerant and be capillary tube regulated. An adjustable thermostat with an off position shall regulate the refrigeration system. Unit shall be listed by Underwriters Laboratories for both the US and Canada and is compliant to the Air Conditioning and Refrigeration Institute Standard 1010. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61. Optional WF3000 PFAS Water Filter shall have 3000 gallon capacity with 3rd Party Certification for Lead, Bacteria, Chlorine, Microplastics, and NSF/ANSI for Cyst and total PFAS reduction.

Model Number	GPH*	Rated Watts	Full Load Amps	Approx. Shipping Weight
A481408S	8.0	390	4.6	110 lbs.

* GPH of 50°F water at 90°F ambient room temperature and 80°F inlet water temperature Compressor motor operates on 115 Volt / 60 Hz single phase.





"INDOOR USE ONLY"

MODEL: (Must Specify)

🔲 A481408F	Flexible Bubbler
🗋 A481408S	Stainless Steel Bubbler

OPTIONS

(additional costs may be incurred)

- -GF2 Glass filler
- □ -220V 220 volt / 50 Hz Compressor (**(€**)

ACCESSORIES

(additional costs may be incurred)

-WF3000 3000-gallon PFAS Water Filter (See Note *) NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics

NOTES:

1- Refer to Supplemental Submittal Sheet for Complete Product details.

* NOTE: For Optional -WF1 And -WF3000: Installer Responsible for Remotely Locating Water Filter.

3000 Gallon PFAS Filter Certifications Product Warranty

MARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MURDOCK[®] **MFG.** • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 • www.murdockmfg.com


Member of MORRIS GROUP

ELECTRIC DRINKING FOUNTAIN

A481.8 Series

MODEL A481408S

FULLY RECESSED, WALL MOUNTED ELECTRIC DRINKING FOUNTAIN

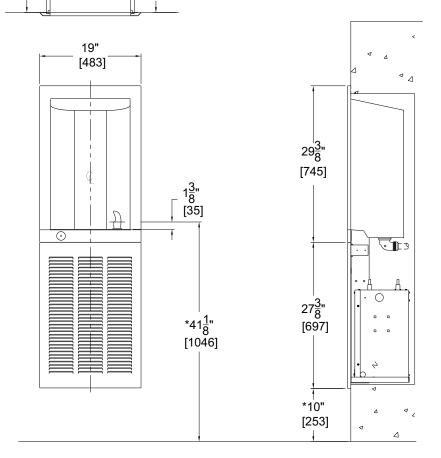

GENERAL NOTES:

 $(\bullet \bullet)$

SINCE 1853

11"

[279]

16<u>3</u>" [416]

-15<u>1</u>"

[384]

10"

[252]

 ALL DIMENSIONS ARE IN INCHES [MM]*2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPY WITH FEDERAL, STATE, & LOCAL CODES
STOP VALVE NOT PROVIDED

MMARY FOR RING	Model Number & Options		_Quantity	All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock®
SELECTION SUMMA & APPROVAL FOR MANUFACTURING	Company			assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of
ECTIO APPR ANUFJ	Contact	Title		optional accessories. Murdock® Mfg., Member of Morris Group
SELE &/	Signature (Approval for Manufacturing)		_Date	International [®] . Please visit www.murdockmfg.com for most current specifications.

MURDOCK[®] MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 • www.murdockmfg.com