



OUTDOOR SHOWERS

Shower Series

OPTION -GB

TWO VERTICAL GRAB BARS AND SECOND SHOWER HEAD

STANDARD FEATURES

- Pushbutton requiring less than 5 pounds for activation
- Adjustable timing, from 5 to 60 seconds
- Chrome plated brass shower head with 2.5 gpm flow control and adjustable spray pattern
- (2) 36" long grab bars
- Vandal resistant fasteners


SUGGESTED SPECIFICATIONS

Option -GB shall include two vertical grab bars and second shower head with pushbutton. When the -GB option is selected for outdoor showers the standard pushbutton will be moved up to accommodate the additional shower head and pushbutton.


Grab bars shall be 1-1/2" O.D x 36" long and constructed of heavy gage type 304 stainless steel.

Additional shower head shall have a 48" discharge height from the finished floor. Shower head shall be chrome plated brass with 2.5 gpm flow restrictor and adjustable spray pattern from a course stream to a fine mist.

Pushbutton shall be mounted at 43" above the finished and require less than 5 pounds of force to activate the internally mounted metering valve. Valve timing shall be adjustable from 5 seconds to 60 seconds.

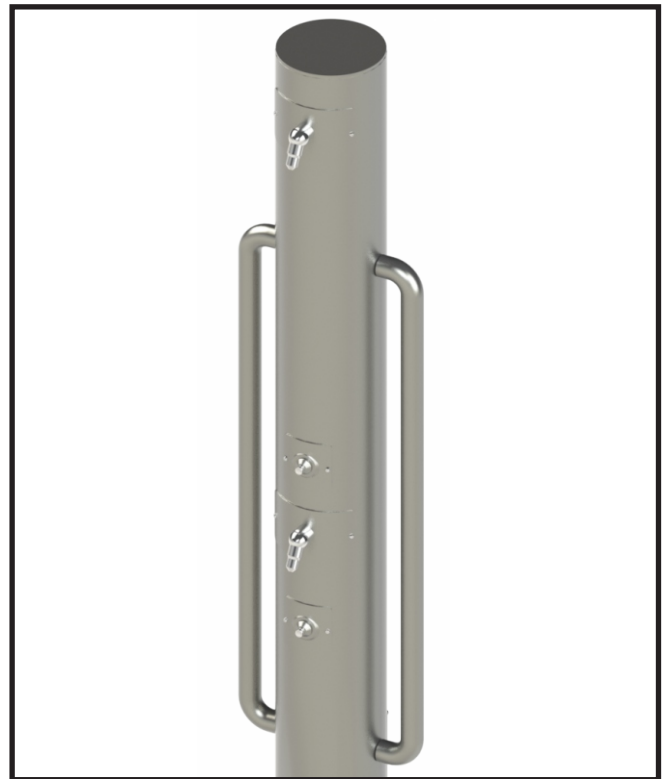

Option: -GB

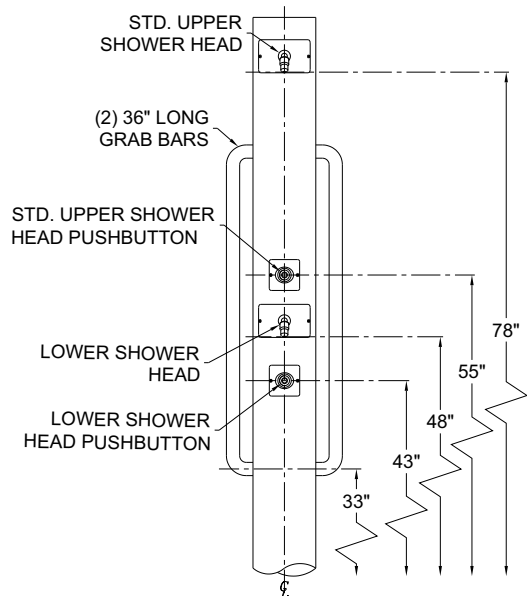

NOTES:
1. ALL DIMENSIONS ARE IN INCHES [MM]



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Please visit www.murdockmfg.com for most current specifications.

Complies with the following standards:



MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP INTERNATIONAL