



# RESTROOM FIXTURES

1033

## MURDOCK-SUPER SECUR RESTROOM FIXTURE


MODEL #  
1033-1034

STALL  
TYPE  
URINAL

ITEM	DESCRIPTION	QTY
1	OPTIONAL FLUSH VALVE	1
2	1/4-20 UNC X 2" ALLEN FT HD SCREW	2
3	1/4" COUNTERSUNK WASHER	2
4	BEEHIVE STRAINER	1



Note: Fixture may show some available options

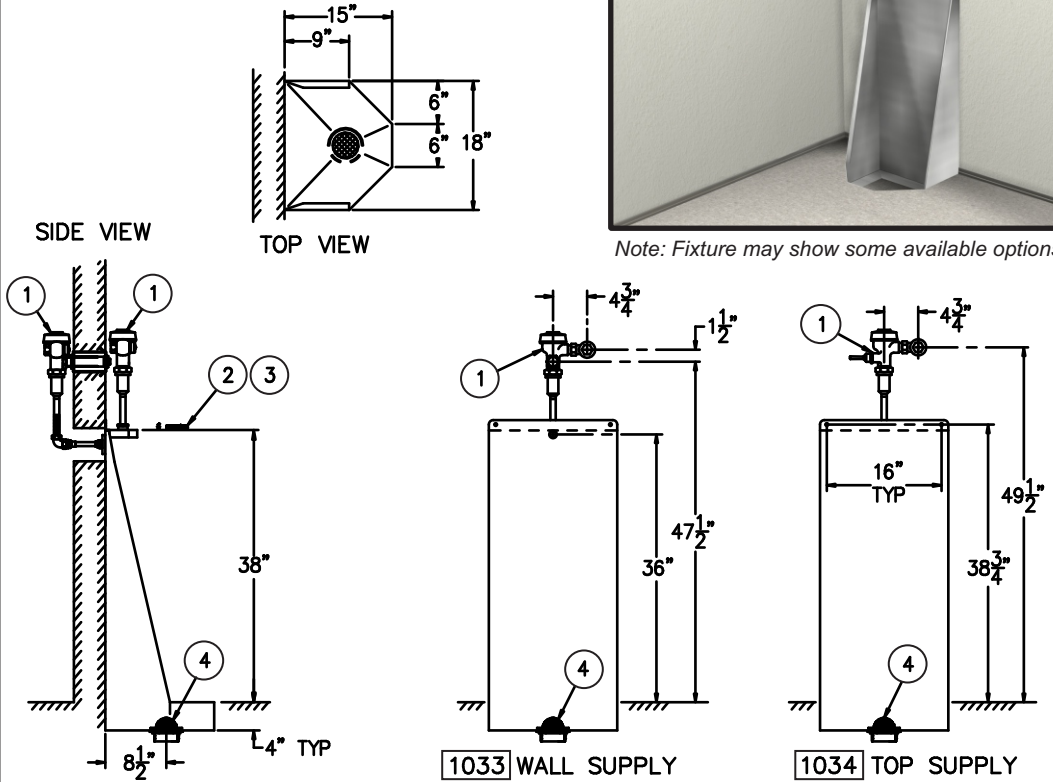

**TECHNICAL DATA:**

Fixture is designed to be installed on a finished wall and serviced from the front side. Fixture is fabricated from 16 gage, type 304 stainless steel and is seamless welded construction. Exterior has a satin finish. Corners are covered to facilitate cleaning.

Urinal is rear wall washdown type and requires a minimum of 35 PSI flow pressure. Bottom is sloped to a high capacity, stainless steel beehive dome strainer. Strainer is secured with tamper-resistant screws. Waste connection is 2" inside caulk. Urinal will operate with a 1.0 gallon flush valve.

Urinal will meet ADA requirements if flush valve handle is at a height of 44" maximum.

Regularly furnished items include tamper-resistant mounting screws.

**MODEL NUMBER:**

- 1033 Stall Type Urinal, Wall Supply
- 1034 Stall Type Urinal, Top Supply

**PRODUCT OPTIONS:**

- EG Enviro-Glaze (for color selection see flier)
- Wall Supply Flush Valve
- Top Supply Flush Valve

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options \_\_\_\_\_ Quantity \_\_\_\_\_

Company \_\_\_\_\_

Contact \_\_\_\_\_ Title \_\_\_\_\_

Signature (Approval for Manufacturing) \_\_\_\_\_ Date \_\_\_\_\_

All dimensions are nominal and subject to change without notice. Murdock-Super Secur assumes no responsibility for use of void or superseded data. Murdock Mfg.™, Member of Morris Group International™. Please visit [www.murdockmfg.com](http://www.murdockmfg.com) for most current specifications.