

DRINKING FOUNTAIN

A441 Series

MODEL A441400S-FG

14 GAGE STAINLESS STEEL WALL MOUNTED DRINKING FOUNTAIN

STANDARD FEATURES

- 14 gage, 304 stainless steel
- Polished stainless steel, brass, anti-rotation, non-squirt bubbler
- 100 mesh inlet strainer
- Vandal resistant screws
- Integral P-trap
- Mounting plate with hardware



SUGGESTED SPECIFICATIONS

Model A441400S-FG is a wall mounted drinking fountain made from **14 gage**, **304 stainless steel** with a brushed finish. Unit shall be activated by a self-closing, front pushbutton, by using less than 5 pounds of force, which activates an internally mounted valve with an adjustable stream regulator controlling the water flow. Bubbler shall be polished stainless steel with a non-squirt feature and operate on a water pressure range of 20-105 psig. Unit shall have a uniquely designed, contoured bowl with P-trap integral to the unit. Unit is certified to ANSI A117.1, NSF/ANSI 61, Section 9 and Public Law 111-380.

MODEL:

(Must Specify)

☐ A441400S-FG

Satin Stainless Finish and Lead-Free Stainless Steel Bubbler

OPTIONS

(additional costs may be incurred)

- ☐ -AD1 Access door
- ☐ -AP1 Access panel for a single fountain
- ☐ -BP2 Back panel for single box contoured fountain
- □ -CSC Concealed support carrier
- -FRA1 Freeze resistant valve
- ☐ -MF1 Mounting frame for a single fountain

Complies with the following standards:















▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP

A441-FG 04/17/18




DRINKING FOUNTAIN


A441 Series

MODEL A441400S-FG

14 GAGE STAINLESS STEEL WALL MOUNTED DRINKING FOUNTAIN



- A. WASTE OUTLET FOR 1-1/4" P-TRAP BY **OTHERS**
- B. Ø25/64" PUNCHING, 4 PLACES FOR ANCHORING HARDWARE BY OTHERS
- C. 3/8" NCT SUPPLY INLET

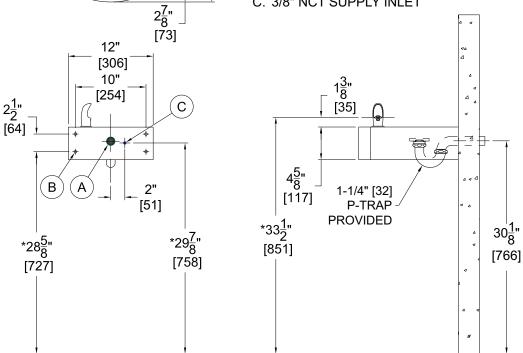

GENERAL NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES [MM]
- *2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPLY WITH FEDERAL, STATE, & LOCAL CODES
- 3. STOP VALVE NOT PROVIDED

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SUMMARY AL FOR TURING	Model Number & Options	_Quantity	All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock
N SUI	Company		assumes no responsibility for use of void or superseded data. Dimensions
ECTION SU APPROVA ANUFACTI	Contact	Title	may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group
SELE & A MA	Signature (Approval for Manufacturing)		International™. Please visit www.murdockmfg.com for most current specifications.
			· · · · · · · · · · · · · · · · · · ·

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP