

A481.8CUSP Series

MODEL A481408S-CUSP

FULLY RECESSED, WALL MOUNTED
ELECTRIC DRINKING FOUNTAIN
AND CUSPIDOR

STANDARD FEATURES

- 18 Gauge, 304 Stainless Steel Cabinet
- 16 Gauge, Galvanized or Galvannealed Mounting Frame (A0000000-MF6)
- Polished Stainless Steel, Anti-Rotation, Non-Squirt Bubbler
- Copper Tube On Stainless Steel Tank Evaporator
- 100-Mesh Inlet Strainer
- Vandal Resistant Screws

SUGGESTED SPECIFICATIONS

Model A481408B-CUSP is a self-contained, fully recessed pressurized electric drinking fountain and cuspidor that shall deliver a minimum of **8.0 GPH** (30.3 LPH) of water at 50°F (10°C) cooled from 80°F (26.7°C) inlet water and 90°F (32.2°C) ambient. Both units shall be activated by a chrome plated brass front push button using less than 5 pounds of force. Bubbler shall be chrome plated brass with an integrally designed non-squirt feature and operate on a water pressure range of 20-105 PSIG. Cabinet panels shall be constructed from 304 stainless steel and the bowl shall have an integral drain. Cooling system shall use R-134a refrigerant and be capillary tube regulated. An adjustable thermostat with an off position shall regulate the refrigeration system. Unit shall be listed by Underwriters Laboratories for both the US and Canada and is compliant to the Air Conditioning and Refrigeration Institute Standard 1010. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately. Optional WF3000 PFAS Water Filter shall have 3000 gallon capacity with 3rd Party Certification for Lead, Bacteria, Chlorine, Microplastics, and NSF/ANSI for Cyst and total PFAS reduction.



"INDOOR USE ONLY"

MODEL:

(Must Specify)

- A481408F-CUSP Flexible Bubbler
- A481408S-CUSP Stainless Steel Bubbler

OPTIONS

(additional costs may be incurred)

- GF2 Glass filler
- 220V 220 volt / 50 Hz Compressor (C €)

ACCESSORIES

(additional costs may be incurred)

- WF3000 3000-gallon PFAS Water Filter¹
NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics

NOTES:

1- Refer to Supplemental Submittal Sheet for Complete Product details.

Model Number	GPH*	Rated Watts	Full Load Amps	Approx. Shipping Weight
A481408S-CUSP	8.0	390	4.6	TBA

* GPH of 50°F water at 90°F ambient room temperature and 80°F inlet water temperature
Compressor motor operates on 115 Volt / 60 Hz single phase.

Complies with the following standards:



NSF/ANSI/CAN 61-2020

ANSI/ASHRAE 18

[3000 Gallon PFAS Filter Certifications](#)

[Product Warranty](#)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov


MURDOCK® MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 • www.murdockmfg.com

Member of
MORRIS GROUP
INTERNATIONAL

A481.8CUSP Series

MODEL A481408S-CUSP

FULLY RECESSED, WALL MOUNTED
ELECTRIC DRINKING FOUNTAIN
AND CUSPIDOR

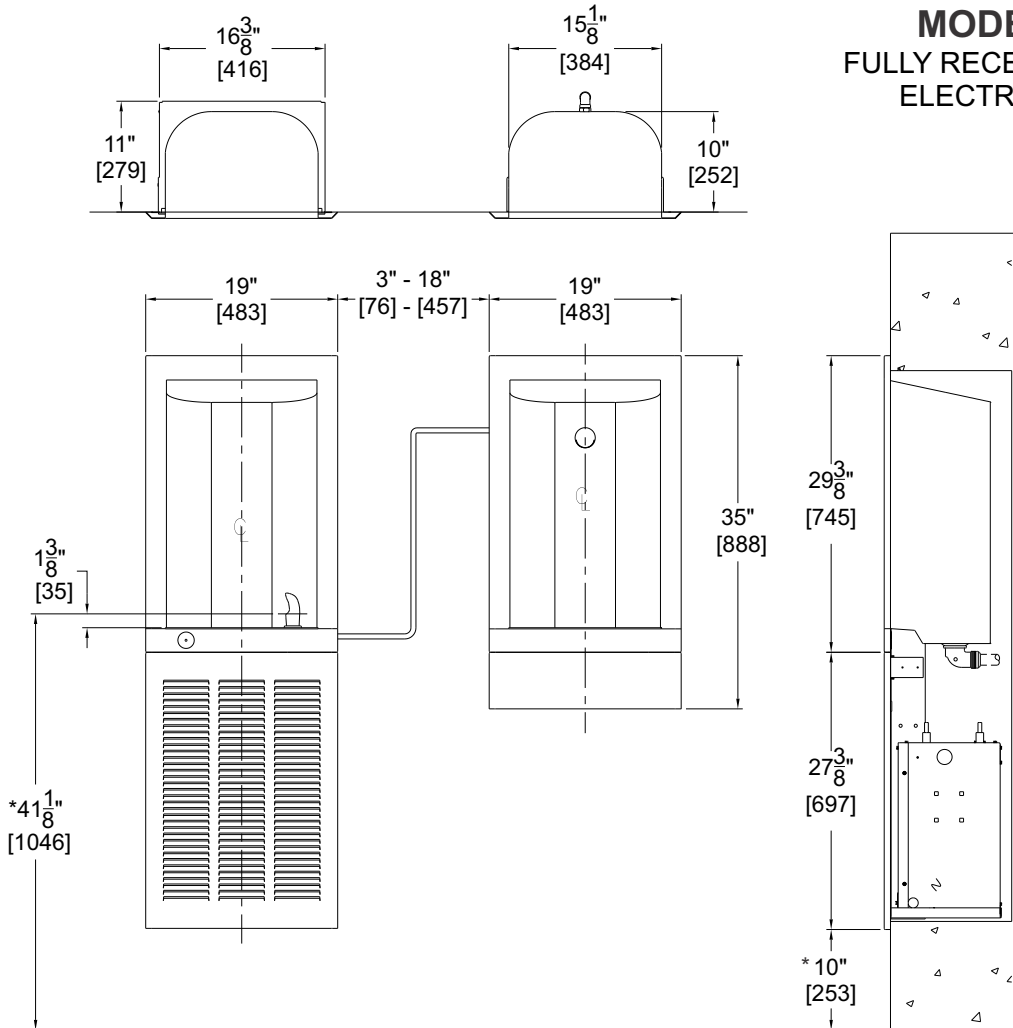

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM]
- *2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPLY WITH FEDERAL, STATE, & LOCAL CODES
3. STOP VALVE NOT PROVIDED

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	Model Number & Options _____	Quantity _____	<p><i>All dimensions are subject to manufacturer's tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock[®] assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock[®] Mfg., Member of Morris Group International[®]. Please visit www.murdockmfg.com for most current specifications.</i></p>
	Company _____		
	Contact _____	Title _____	
	Signature (Approval for Manufacturing) _____	Date _____	