

BOTTLE FILLER

BF11 Bottle Filler Series

H₂O TO GO![®] PUSHBUTTON OPERATED BOTTLE FILLER

STANDARD FEATURES

- ADA Compliant
- 100-Mesh Inlet Strainer
- Pushbutton Operation
- 1 GPM Laminar Flow Nozzle
- Fits A171-UG. A172-UG Series Fountains and Coolers
- May be used with certain competitor models (Contact Factory for more information)



"INDOOR USE ONLY"

SUGGESTED SPECIFICATIONS

Bottle Filling unit shall include Pushbutton operated activation. Existing Drinking Fountain may require alteration for connection to Bottle Filler. Housing construction will be 20 gage Stainless Steel with a satin finish and will also include components manufactured from Antimicrobial, impact resistant ABS. Bottle Filler shall provide approximately 1.0 GPM flow rate with a Laminar Flow Spout to minimize splashing. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61. Optional WF3000 PFAS Water Filter shall have 3000 gallon capacity with 3rd Party Certification for Lead, Bacteria, Chlorine, Microplastics, and NSF/ANSI 53 for Cyst and total PFAS reduction.

MODEL:

(Must Specify)

☐ BF11 Pushbutton Operated Bottle Filler

ACCESSORIES:

(Additional costs may apply. Accessory items are packaged separately.)

☐ -WF3000 3000-Gallon PFAS Water Filter¹
NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics

NOTES:

1- Refer to Supplemental Submittal Sheet for details.

Complies with the following standards:





3000 Gallon PFAS Filter Certifications

Product Warranty

▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • www.murdockmfg.com



BF11


Revised: 01/17/25





BOTTLE FILLER

BF11 Bottle Filler Series

H₂O TO GO!® PUSHBUTTON OPERATED BOTTLE FILLER



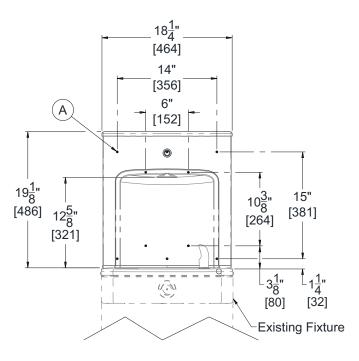

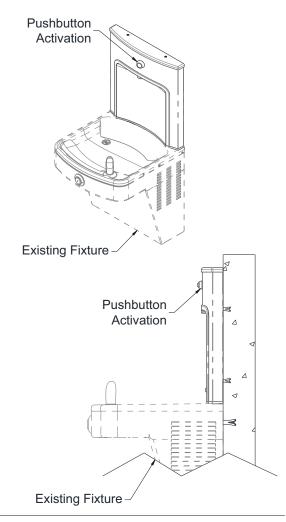

General Note:

1. All dimensions are in inches [MM]

A. Ø1/4" Holes, 10 Places for Anchoring Hardware, provided by others

JMMARY L FOR URING	Model Number & Options	_Quantity	All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock®
SELECTION SUMMAR & APPROVAL FOR MANUFACTURING	Contact Signature (Approval for Manufacturing)		assumes no responsibility for use of void or superseded date. Dimensions may change with the addition of optional accessories. Murdock* Mfg., Member of Morris Group International*. Please visit www.murdocknfig.com for most current specifications.

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • www.murdockmfg.com

Member of MORRIS GROUP