

GS Series

MODEL GSD75-BP6

BARRIER FREE, BI-LEVEL,
WALL MOUNTED DRINKING FOUNTAIN

STANDARD FEATURES

- Both Child and Adult ADA Compliant (when properly installed)
- Resistant to sunlight, heat moisture and wear
- 18 gage, 304 stainless steel bowl
- 12 gage, heavy duty stainless steel arm, corrosion and scratch resistant finish
- Polished stainless steel, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- P-trap, 1-1/4" O.D.
- Vandal resistant bottom stainless steel plate and screws
- Back panel

SUGGESTED SPECIFICATIONS

Model GSD75-BP6 is a wall mounted, vandal resistant bi-level square drinking fountain made from 18 gage, 304 stainless steel bowls mounted into green powder coated 12 gage, heavy duty stainless steel support arms with a steel powder coated back panel. Unit shall be activated by front mounted self-closing buttons, by using less than 5 pounds of force, which activates internally mounted valves with adjustable stream regulators controlling the water flow. Bubblers shall be polished chrome plated brass with non-squirt features and operate on water pressure range of 20-105 psig. Fountain is certified to ANSI A117.1, Public Law 111-380 (NO-LEAD), CHSC 116875 and NSF/ANSI 61, Section 9. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately.



MODEL:

(Must Specify)

- ☐ GSD74-BP6 Satin stainless finish
 - ☐ GSD75-BP6 Green powder-coated (Shown)
 - ☐ GSD76-BP6 Red powder-coated
 - ☐ GSD77-BP6 Blue powder-coated
- Custom color finishes available upon request

OPTIONS

(additional costs may be incurred)

- ☐ -FRA4 Freeze resistant valve system

ACCESSORIES

(additional costs may be incurred)

- ☐ -A0000000-MP2 Mounting Plate
- ☐ -SK6 Skirt kit (finish match)



Member of
U.S. Green
Building
Council



Recyclable
Product



Water
Conserving
Product

Please visit www.murdockmfg.com
for most current specifications.

Complies
with the
following
standards:




All dimensions are subject to manufactures tolerance of plus or minus 1/8" nominal and subject to change without notice. Murdock Mfg. assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.Murdockmfg.com for most current specifications.

IMPORTANT: INSTALLATION AND SITE PREP FOR FREEZE RESISTANT OPTIONS "-FRA" WILL DIFFER FROM STANDARD. REFER TO DESIGNATED FREEZE RESISTANT INSTALLATION DETAILS.

GS Series

MODEL GSD75-BP6

BARRIER FREE, BI-LEVEL,
WALL MOUNTED DRINKING FOUNTAIN

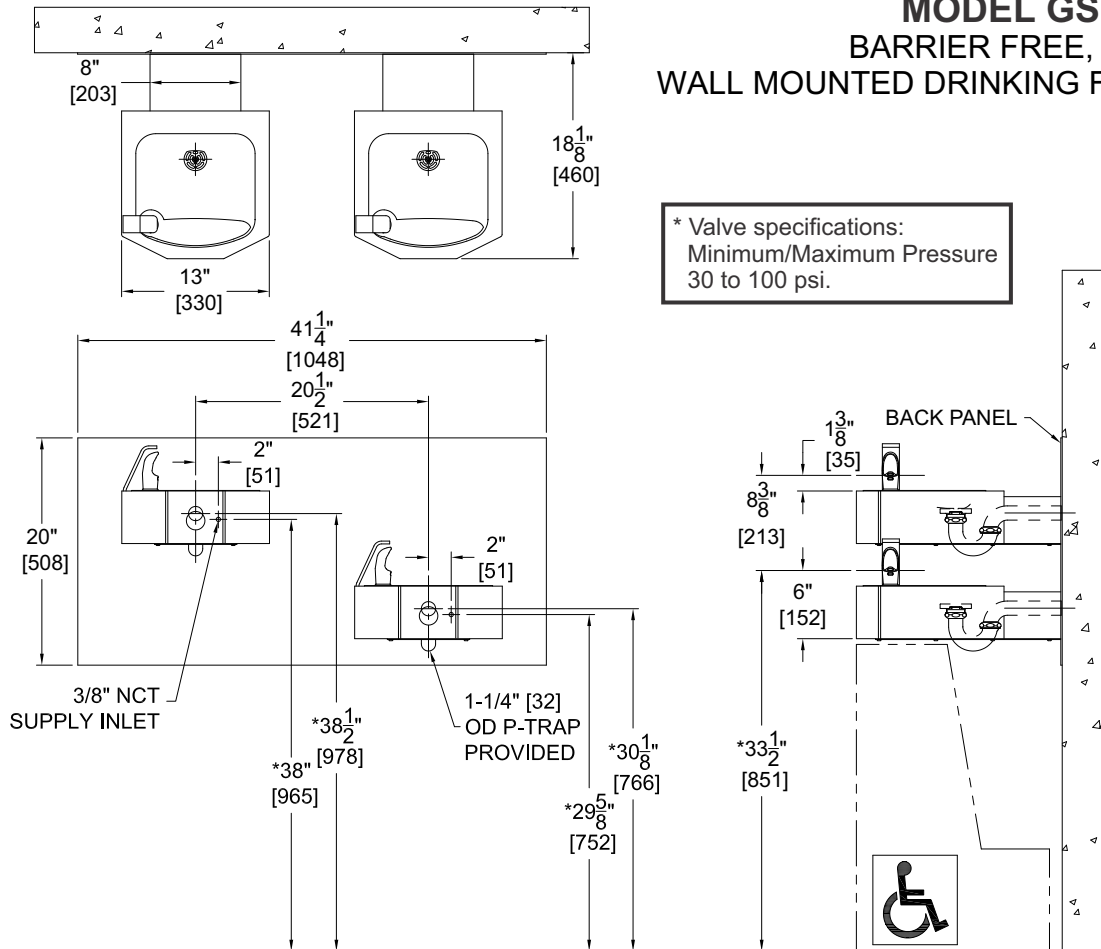

* Valve specifications:
Minimum/Maximum Pressure
30 to 100 psi.

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPLY WITH FEDERAL, STATE, & LOCAL CODES.
3. STOP VALVE NOT PROVIDED.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	Model Number & Options _____	Quantity _____	All dimensions are subject to manufactures tolerance of plus or minus 1/8" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.murdockmfg.com for most current specifications.
	Company _____		
	Contact _____	Title _____	
	Signature (Approval for Manufacturing) _____		
	Date _____		