



# CONTEMPORARY DRINKING FOUNTAINS

## GV Series

### MODEL GVM49-FRU2

BARRIER FREE, BI-LEVEL,  
FREEZE RESISTANT, PEDESTAL  
MOUNTED DRINKING FOUNTAIN

#### STANDARD FEATURES

- Adult ADA Compliant
- Resistant to sunlight, heat, moisture and wear
- 18 gage, 304 stainless steel bowl
- Reinforced concrete with aggregate finish
- Polished stainless steel, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- Access door, heavy duty steel, vandal resistant
- Vandal resistant galvanized steel bottom plate
- Freeze resistant valve system

#### SUGGESTED SPECIFICATIONS

Model GVM49-FRU2 is a barrier free pedestal mounted, vandal resistant, freeze resistant, bi-level square drinking fountain made from 18 gage, 304 stainless steel bowls mounted into a reinforced brown concrete aggregate pedestal. Unit shall be activated by front mounted push buttons, by using less than 5 pounds of force, which pneumatically activates water valves mounted below the frost line. Internally mounted adjustable stream regulators shall control the water flow. Bubblers shall be polished stainless steel with non-squirt features and operate on water pressure range of 20-105 psig. Fountain is certified to ANSI A117.1, Public Law 111-380 (NO-LEAD), CHSC 116875 and NSF/ANSI 61, Section 9. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately.



#### MODEL:

(Must Specify)

- GVM48-FRU2 Tan Concrete Aggregate
- GVM49-FRU2 Brown Concrete Aggregate (Shown)

#### OPTIONS

(additional costs may be incurred)

- CH30 Child height, 30" bubbler height
- FS Foot spray [If added, model requires -FRU3]
- IGM In-ground 14" mounting
- JFFR1 Jug filler, recessed, freeze resistant, plain end with self-closing valve
- PF Pet fountain receptor [If added, model requires -FRU3]
- SCS Square concrete step

Complies with the following standards:



Federal Public Law 111-380 (No Lead)



Member of U.S. Green Building Council



Recyclable Product



Water Conserving Product

⚠ WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA  
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • [www.murdockmfg.com](http://www.murdockmfg.com)

Member of MORRIS GROUP INTERNATIONAL




# CONTEMPORARY DRINKING FOUNTAINS

## GV Series

### MODEL GVM49-FRU2

BARRIER FREE, BI-LEVEL, FREEZE RESISTANT, PEDESTAL MOUNTED DRINKING FOUNTAIN

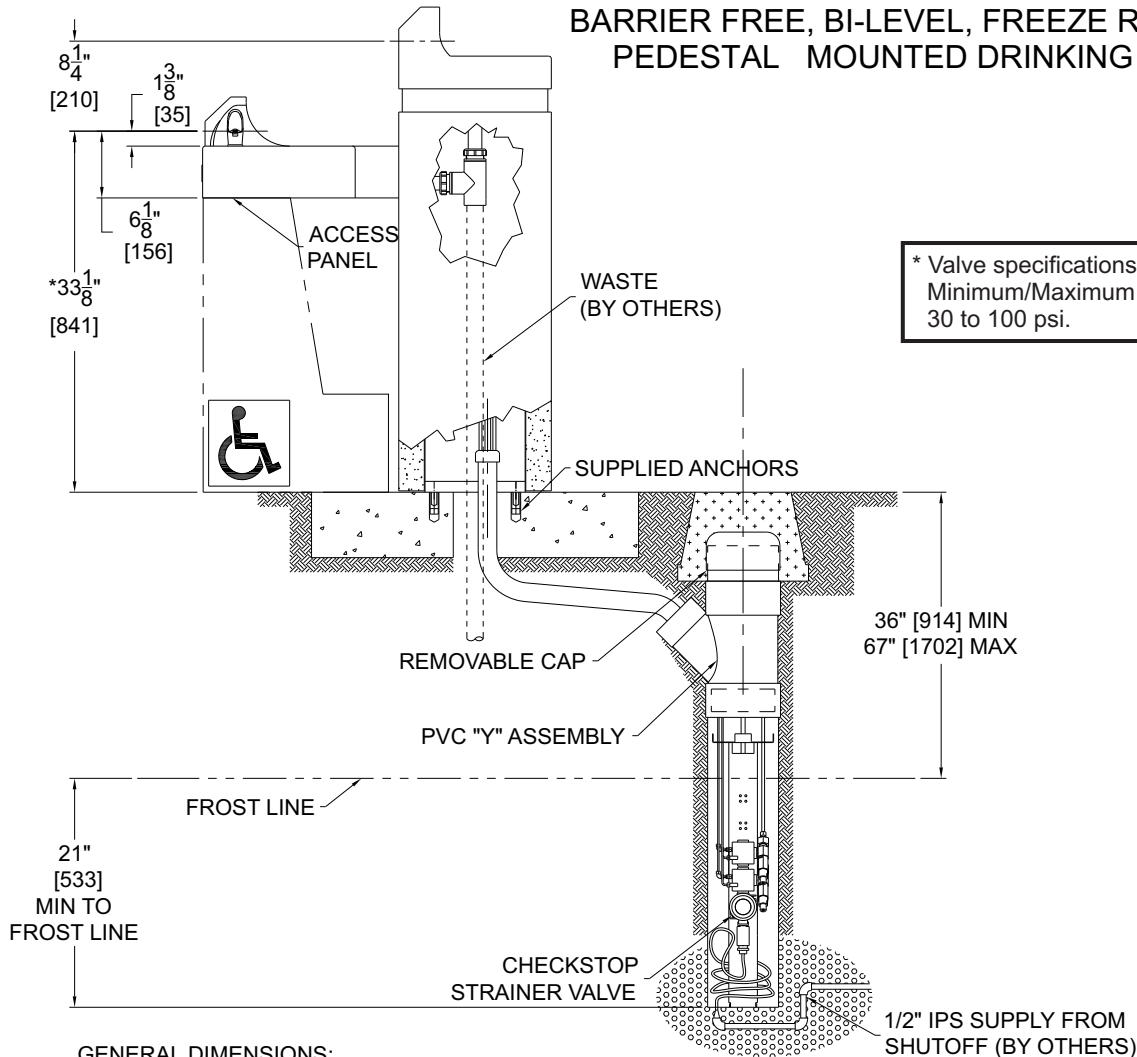

\* Valve specifications:  
Minimum/Maximum Pressure  
30 to 100 psi.

**GENERAL DIMENSIONS:**

1. ALL DIMENSIONS ARE IN INCHES [MM].

\*2. STANDARD ADULT ADA HEIGHT SHOWN. OPTIONAL -CH30 CHILD ADA HEIGHT MODEL AVAILABLE.

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	Model Number & Options _____	Quantity _____	All dimensions are subject to manufactures tolerance of plus or minus 1/2" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit <a href="http://www.murdockmfg.com">www.murdockmfg.com</a> for most current specifications.
	Company _____		
	Contact _____	Title _____	
	Signature (Approval for Manufacturing) _____	Date _____	

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA  
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • [www.murdockmfg.com](http://www.murdockmfg.com)

Member of MORRIS GROUP INTERNATIONAL