

GY Series

MODEL GYQ84

PEDESTAL MOUNTED LARGE CAPACITY
BOTTLE FILLER DESIGN WITH BI-LEVEL
DRINKING FOUNTAINS

STANDARD FEATURES

- Adult ADA Compliant
- Pushbutton And Hands Free Sensor Operated Bottle Filler
- Auto-Purge Sensor Function to Assure Fresh Water Supply
- Oversize Bottle Filler Opening with Laminar Flow Spout
- Accommodates Extra Large Bottles Up to 7" Dia x 13" Tall
- Resistant To Sunlight, Heat, Moisture And Wear
- 18 Gauge, 304 Stainless Steel Drinking
- Fountain Bowls
- 12 Gauge, Heavy Duty Stainless Steel Construction With Corrosion And Scratch Resistant Finish
- Stainless Steel, Anti-Rotation Non-Squirt Bubbler
- 100-Mesh Inlet Strainer
- Access Cover, Heavy Duty Stainless Steel Vandal Resistant

SUGGESTED SPECIFICATIONS

Pedestal mounted bottle filler with bi-level drinking fountain shall be Murdock model GYQ84. Construction shall be 12 gauge, all stainless steel with 18 gauge stainless steel fountain bowls. Pedestal shall have four mounting holes. Access covers shall be secured with vandal-resistant stainless steel screws. Bottle filler shall be activated by a 9 volt sensor or a pushbutton as standard and provide 1.5 GPM (5.7 LPM) flow. Auto-Purge Sensor function shall activate Bottle Filler for 10 second duration 24 hours after last activation as standard and allow for purge cycle adjustment. Unit shall contain a 100 mesh inlet strainer, 6-AA battery pack and laminar flow spout. Self-closing pushbuttons, needing less than 5 pounds force, shall activate internally mounted valves with adjustable stream regulators. Bubblers shall be stainless steel with non-squirt feature and operate on water pressure range of 20-105 psig. Fountain is certified to ANSI A117.1. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61. Fixture meets ADA and ADA Standing Person, requirements when mounted appropriately.

Product Warranty

3000 Gallon PFAS Filter Certifications

Option Notes:

¹ See separate option sheet

² This option is not available freeze-resistant.

Complies
with the
following
standards:



Federal
Public Law
111-380
(No Lead)



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



Model GYQ85 Shown

MODEL:

(Must Specify)

- | | |
|--------------------------------|-----------------------------|
| <input type="checkbox"/> GYQ84 | Satin Stainless Finish |
| <input type="checkbox"/> GYQ85 | Green Powder-Coated (Shown) |
| <input type="checkbox"/> GYQ86 | Red Powder-Coated |
| <input type="checkbox"/> GYQ87 | Blue Powder-Coated |

Custom color finishes available upon request

OPTIONS

(additional costs may be incurred)

- | | |
|--------------------------------|---|
| <input type="checkbox"/> -CH30 | Child Height, 30" Bubbler Height |
| <input type="checkbox"/> -CV | Cartridge Valve On Fountain ^{1,2} |
| <input type="checkbox"/> -FRU3 | Freeze Resistant, 3 Valves ¹ (Less Sensor & Filter ¹ N/A) |
| <input type="checkbox"/> -FRU4 | Freeze Resistant, 4 Valves ¹ (Less Sensor & Filter ¹ N/A) |
| <input type="checkbox"/> -HB1 | Hose Bibb, Compression, w/ Hose Threaded Outlet/VB ^{1,2} |
| <input type="checkbox"/> -HB3 | Hose Bibb, Loose Key, Vandal Resistant, Locked Door w/ Hose Threaded Outlet/VB ^{1,2} |
| <input type="checkbox"/> -IGM | In-ground 14" Mounting Adapter |
| <input type="checkbox"/> -MO | Bottle Filler Operated By Pushbutton Only (Standard w/ Freeze-resistant Valves) |
| <input type="checkbox"/> -NP2 | Non-Pollutable, Freeze Resistant, 2 Valves (Less Sensor & Filter ¹ N/A) |
| <input type="checkbox"/> -NP3 | Non-Pollutable, Freeze Resistant, 3 Valves (Less Sensor & Filter ¹ N/A) |
| <input type="checkbox"/> -NP4 | Non-Pollutable, Freeze Resistant, 4 Valves (Less Sensor & Filter ¹ N/A) |
| <input type="checkbox"/> -PF | Pet Fountain Receptor ¹ |
| <input type="checkbox"/> -SLPT | 10° Bottle Filler Sloped Top |

ACCESSORIES

(additional costs may be incurred)

- | | |
|----------------------------------|--|
| <input type="checkbox"/> -AP | Auto-Purge Sensor Function Controller |
| <input type="checkbox"/> -IAP | In-Ground Anchor Plate |
| <input type="checkbox"/> -LSR | Bowl With Leaf And Debris Strainer ¹ |
| <input type="checkbox"/> -SK10 | Cane Detection Skirt (for Non-ADA Arm ¹) |
| <input type="checkbox"/> -WF3000 | 3000-Gallon PFAS Water Filter ¹ NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics (N/A with FRA2 ¹) |



IMPORTANT: INSTALLATION AND SITE PREP FOR FREEZE RESISTANT OPTIONS "-FRU" WILL DIFFER FROM STANDARD. REFER TO DESIGNATED FREEZE RESISTANT INSTALLATION DETAILS.

* Valve specifications:
Minimum/Maximum Pressure
30 PSI to 100 PSI.

GY Series



MODEL GYQ84

PEDESTAL MOUNTED LARGE CAPACITY BOTTLE
FILLER DESIGN WITH BI-LEVEL DRINKING FOUNTAIN

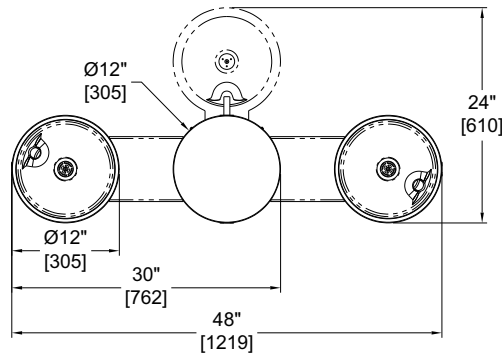

**OPTIONAL -PF PET
FOUNTAIN DETAIL**

*NOTE: For -CH30 OPTION DIMENSION
BECOMES 24" [610].

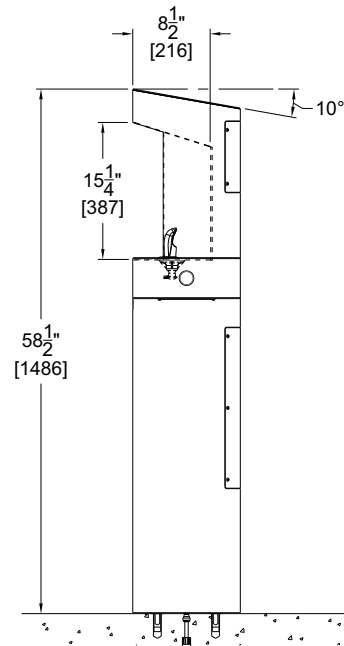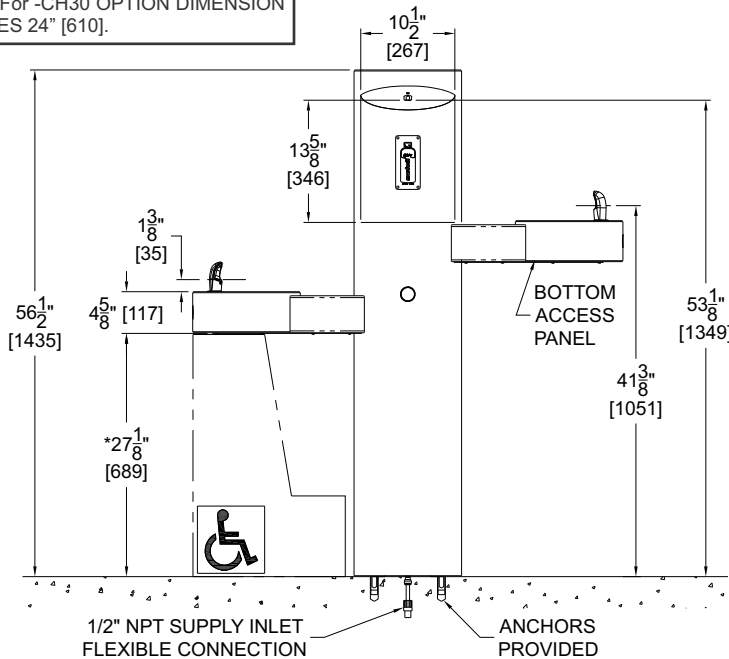

**OPTIONAL -SLPT
SLOPING TOP**

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM]
2. STOP VALVE NOT PROVIDED
3. MODELS MANUFACTURED FROM JANUARY 2025 TO PRESENT INCLUDE LARGER BOTTLE FILL AREA.

SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock® Mfg., Member of Morris Group International®. Please visit www.murdockmfg.com for most current specifications.