




HYDRANTS

FREEZELESS SILLCOCK

FUNCTION: For installation in interior or exterior building walls where an exposed hose connection is acceptable. Self-Draining feature provides positive non-freeze protection and integral vacuum breaker provides backflow protection.

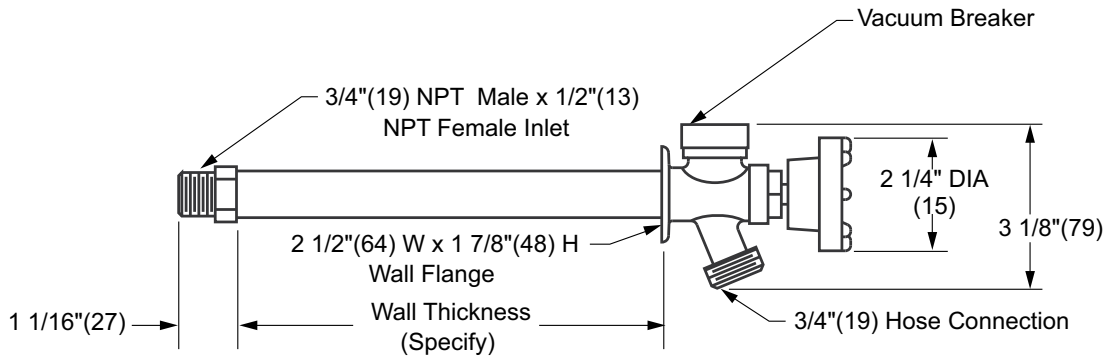

- Fig. M3630-04(100) Wall Thickness
- Fig. M3630-06(150) Wall Thickness
- Fig. M3630-08(205) Wall Thickness
- Fig. M3630-10(255) Wall Thickness
- Fig. M3630-12(305) Wall Thickness

NOTES:

- 1.Recommended wall opening 1 1/4"(32). Hydrant shall be installed in horizontal position only with hose connection pointing down.
- 2.When ordering, specify wall thickness in 02"(51) increments as follows: 04(100), 06(150), 08(205) 10(255) or 12 (305).
- 3.All hydrants are manufactured with "NO-LEAD" brazing rings and USDA approved lubricants.
- 4.The AB1953, California Lead Law and NSF/ANSI Standard 61-2008 - Drinking Water Components are not applicable to hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
- 5.Dimensions shown in parentheses are in millimeters.
- 6.FOR IRRIGATION PURPOSES ONLY.

REGULARLY FURNISHED:

Rough Bronze Chrome Plated Non-Freeze Hydrant with Integral Wall Flange and Vacuum Breaker, Wheel Handle and 3/4"(19) Hose Connection.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	Model Number & Options _____	Quantity _____	All dimensions are subject to manufactures tolerance of plus or minus 1/2" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.murdockmfg.com for most current specifications.
	Company _____		
	Contact _____	Title _____	
	Signature (Approval for Manufacturing) _____	Date _____	

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
 Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP INTERNATIONAL