

## Shower Series

### MODEL M-PCS14 ONE STATION POOL AND BEACH SHOWER

#### STANDARD FEATURES

- Pushbutton requiring less than 5 pounds for activation
- Adjustable timing, from 5 to 60 seconds
- Chrome plated brass shower head with 1.6 gpm flow control and adjustable spray pattern
- Vandal resistant fasteners
- Shut off valve for easy servicing
- Heavy duty, 14 gage, 304 stainless steel construction with corrosion and scratch resistant satin finish
- 1/4" Thick, Anchor Plate with O-ring x 3/4" NPT inlet connection provided

#### SUGGESTED SPECIFICATIONS

Column shower shall be Murdock model M-PCS14, single station shower. Unit is to be pre-piped and hydrostatically tested.

Valve shall have internally mounted metering valve, pushbutton operated and requiring less than 5 pounds of force to activate. Timing shall be adjusted from 5 to 60 seconds.

Shower head shall be chrome plated brass with 1.6 gpm flow restrictor and include an adjustable spray pattern from a coarse stream to a fine mist.

Unit shall be constructed of heavy duty 14 gage type 304 stainless steel polished to a satin finish with vandal resistant fasteners and shall include a 1/4" thick stainless steel Anchor Plate, providing secure mounting for shower.

#### MODEL:

(Must Specify)

- M-PCS14 Satin Stainless Finish (Shown)
- M-PCS15 Green Powder-Coated
- M-PCS16 Red Powder-Coated
- M-PCS17 Blue Powder-Coated

Custom color finishes available upon request

Complies with the following standards:




Federal Public Law 111-380 (No Lead)



Recyclable Product

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Please visit [www.murdockmfg.com](http://www.murdockmfg.com) for most current specifications.

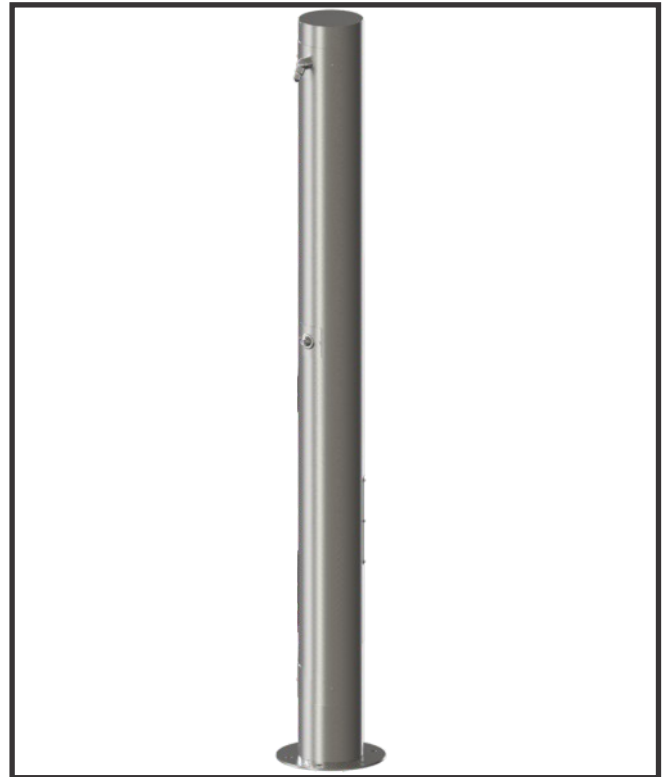

Standard Model: M-PCS14

#### OPTIONS

(additional costs may be incurred)

- FRU1 Underground freeze-resistant valve for one pushbutton (-IAP Option Required) <sup>2</sup>
- FRU2 Underground freeze-resistant valve for two pushbuttons (-IAP Option Required) <sup>2</sup>
- FRU3 Underground freeze-resistant valve for three pushbuttons (-IAP Option Required) <sup>2</sup>
- FS Foot Shower at one station <sup>1</sup>
- GB Grab bar - Two vertical grab bars and second lower shower head at 48" <sup>1</sup>
- IAP In-ground anchor plate (Required with -FRU Option, replaces standard Anchor Plate) <sup>2</sup>
- HB1 Hose Bibb, exposed compression with Hose outlet thread VB <sup>13</sup>
- HB2 Hose Bibb, exposed Loose Key with Hose outlet thread VB <sup>13</sup>
- HB3 Hose Bibb, Loose Key, Vandal Resistant with Hose outlet thread VB <sup>13</sup>
- LOGO Customer specified logo <sup>1</sup>

#### Options Notes:


<sup>1</sup> See separate option sheet.

<sup>2</sup> IAP required for FRU Freeze Resistant Valve options.

<sup>3</sup> The Hose Bibb option is not available or included with the FRU freeze-resistant components.

**Shower Series**

**MODEL M-PCS14  
ONE STATION POOL  
AND BEACH SHOWER**

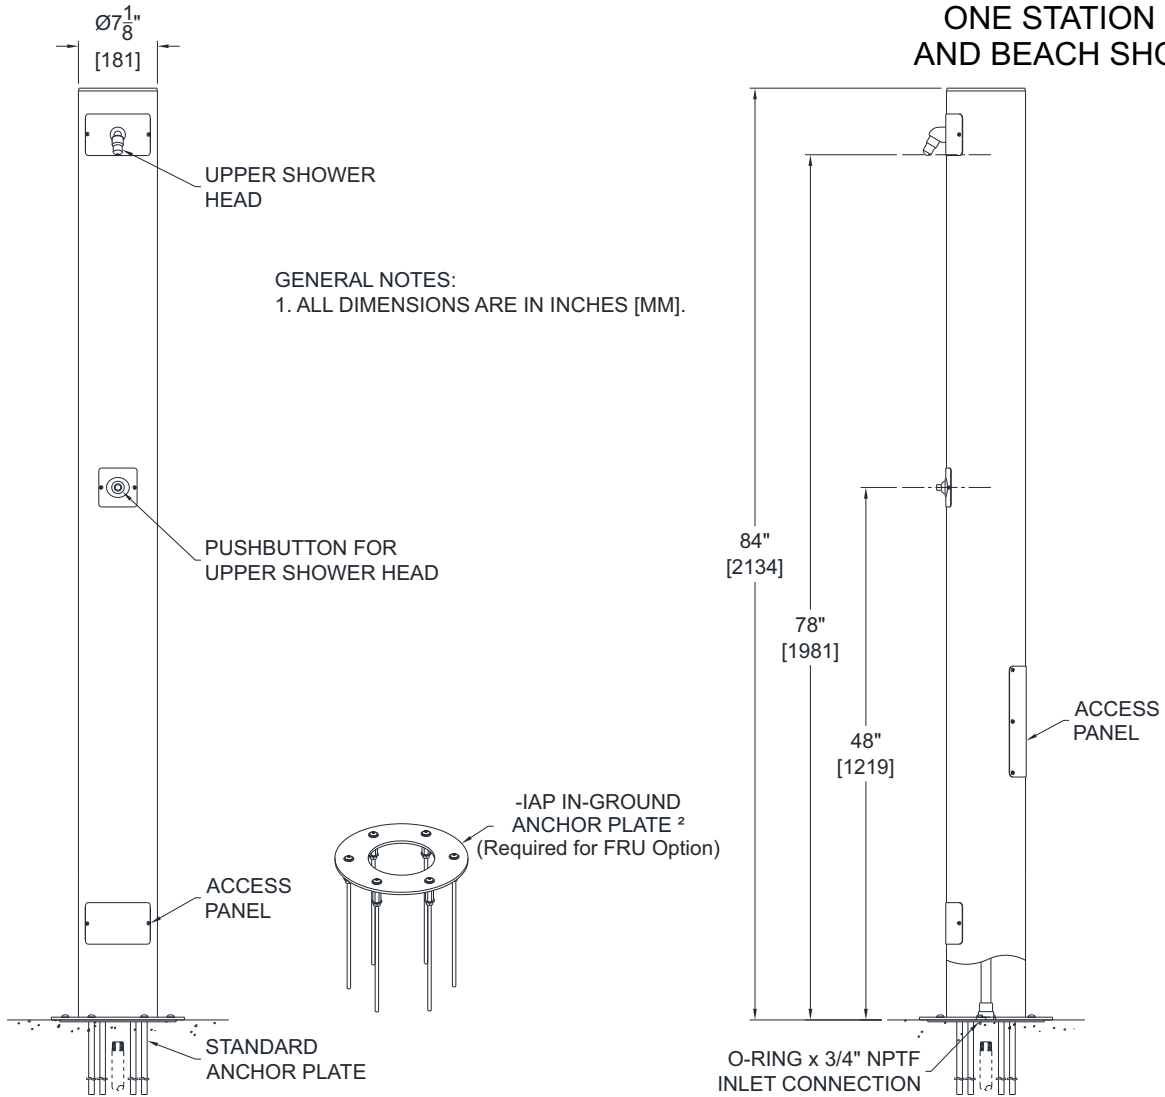

SELECTION SUMMARY  
& APPROVAL FOR  
MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock<sup>®</sup> assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock<sup>®</sup> Mfg., Member of Morris Group International<sup>®</sup>. Please visit [www.murdockmfg.com](http://www.murdockmfg.com) for most current specifications.