

PET SERIES

Pet Fountain Series

BASE MODEL M-PM34 PET FOUNTAIN

STANDARD FEATURES

- 100 mesh inlet strainer
- Pushbutton requiring less than 5 pounds for activation
- Vandal resistant stainless steel Access Panel
- 18 gage, 304 stainless steel basin
- Heavy duty, type 304 stainless steel housing
- Available polished to a #4 satin finish



Pet fountain shall be Murdock[®] model M-PM34, single station pet fountain. Pet Fountain Pushbutton shall be self-closing requiring less than 5 pounds of force to activate the internally mounted valve. Spout water outlet shall be stainless steel tube and operate on a water pressure range of 20-105 psig.

Unit shall be constructed of 14 gage type 304 stainless steel polished to a satin finish with 18 gage pet fountain bowl. Bottom plate shall be 3/16" thick and include three mounting holes with two additional mounting holes for pet fountain. 1/2" expansion anchor bolts shall be furnished. All other exposed fasteners shall be vandal resistant stainless steel screws.



Model M-PM34 Shown

MODEL:

(Must Specify)

M-PM34	Pet Fountain Satin Stainless Finish (Shown)
☐ M-PM35	Pet Fountain Green Powder-Coat
☐ M-PM36	Pet Fountain Red Powder-Coat
☐ M-PM37	Pet Fountain Blue Powder-Coat

Custom color finishes available upon request

OPTIONS

(additional costs may be incurred)

🔲 - FRU1	Underground freeze-resistant valve ¹

☐ - IAP In-ground anchor plate ¹☐ - LOGO Customer Specified logo ¹

Options Notes:

¹ See separate option submittal sheet for additional details.

Complies with the following standards:



Product Warranty

▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov


MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • www.murdockmfg.com



M-PM34 04/10/2024



PET SERIES

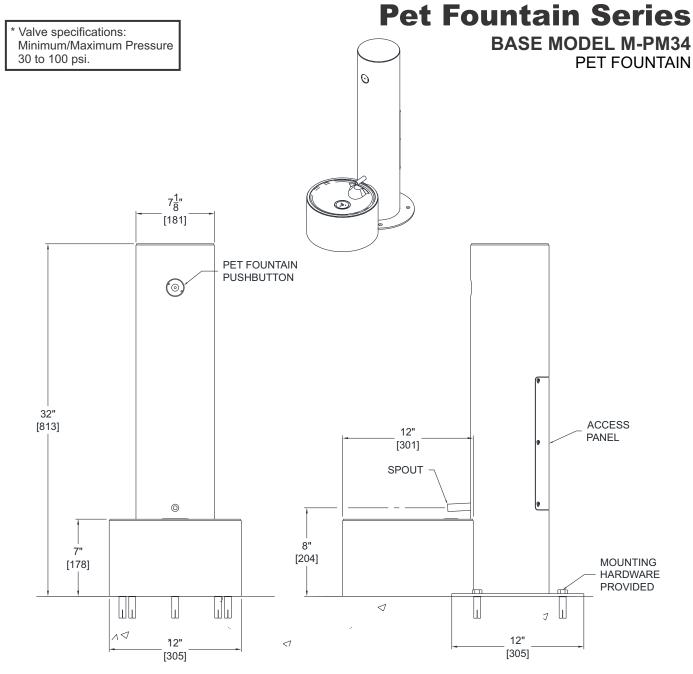

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM].

UMMARY AL FOR URING	Model Number & Options		_Quantity
ON SUN ROVAL FACTUR	Company		
PPRC	Contact	_Title	
SELEC & AI MAN	Signature (Approval for Manufacturing)	Date	

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock® Mfg., Member of Morris Group International®. Please visit www.murdockmfg.com for most current specifications.

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • www.murdockmfg.com

Member of MORRIS GROUP