



PET FOUNTAINS

Pet Fountain Series

MODEL M-PM54

PET WASH WITH DUAL HOSE CONNECTIONS AND HOSE HOLDER

STANDARD FEATURES

- 100 mesh inlet strainer
- Hose holder (hoses furnished locally)
- Pushbutton requiring less than 5 pounds for activation
- Metering air control valves timing adjustable from 5 to 60 seconds
- Dual 3/4" hose outlets include vacuum breakers
- Vandal resistant stainless steel access panel
- Heavy duty, 304 stainless steel polished to a satin finish

SUGGESTED SPECIFICATIONS

Pet fountain shall be Murdock model M-PM54, dual hose connection with hose holder.

Valves shall be internally mounted metering valves, pushbutton operated and requires less than 5 pounds of force to activate. Timing can be adjusted from 5 to 60 seconds.

Unit shall be constructed of 14 gage type 304 stainless steel polished to a satin finish. Bottom plate shall be 3/16" thick and include four mounting holes. 1/2" expansion anchor bolts shall be furnished. All other exposed fasteners shall be vandal resistant stainless steel screws.



Standard Model: M-PM54

MODEL: (Must Specify)

- M-PM54 Satin stainless finish (Shown)
- M-PM55 Green powder-coat
- M-PM56 Red powder-coat
- M-PM57 Blue powder-coat

Custom color finishes available upon request

OPTIONS

(additional costs may be incurred)

- FRU2 Underground freeze-resistant valve ¹
- IAP In-ground anchor plate ¹
- LOGO Customer Specified logo ¹

Options Notes:

¹ See separate option sheet.

Complies with the following standards:



Member of
U.S. Green
Building
Council



Recyclable
Product

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of
MORRIS GROUP
INTERNATIONAL




PET FOUNTAINS

Pet Fountain Series

MODEL M-PM54

PET FOUNTAIN WITH DUAL HOSE BIBB AND HOSE HOLDER

* Valve specifications:
Minimum/Maximum Pressure
30 to 100 psi.

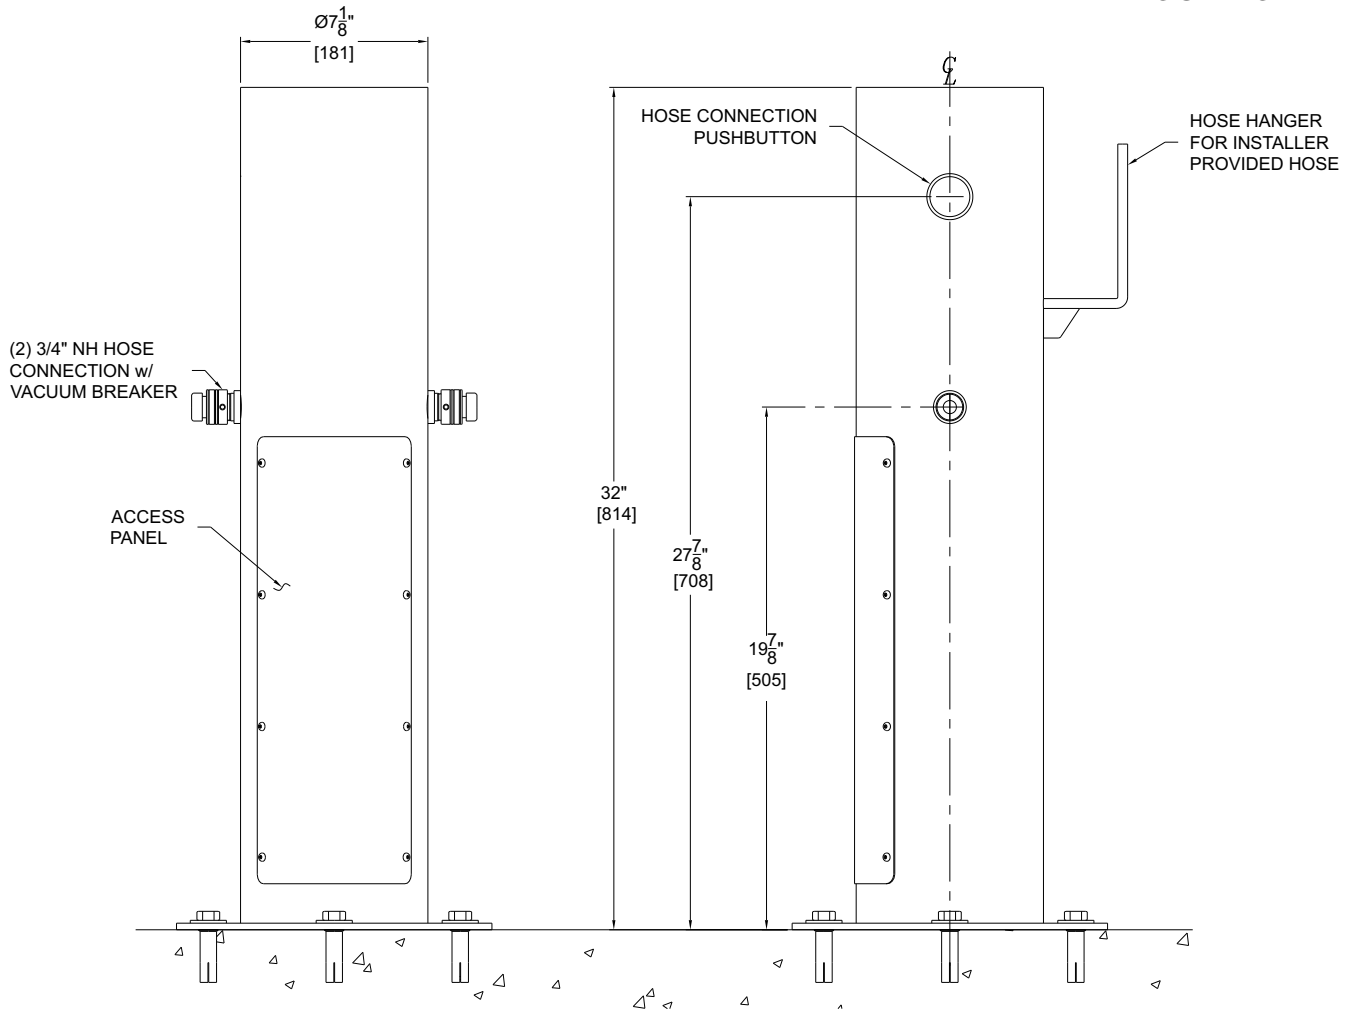

GENERAL NOTES:
1. ALL DIMENSIONS ARE IN INCHES [MM].

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	Model Number & Options _____	Quantity _____	All dimensions are subject to manufactures tolerance of plus or minus 1/2" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.murdockmfg.com for most current specifications.
	Company _____		
	Contact _____	Title _____	
	Signature (Approval for Manufacturing) _____	Date _____	

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP INTERNATIONAL