

Pet Fountain Series

MODEL M-PM54

PET WASH WITH DUAL HOSE
CONNECTIONS AND HOSE HOLDER

STANDARD FEATURES

- 100 mesh inlet strainer
- Hose holder (hoses furnished locally)
- Pushbutton requiring less than 5 pounds for activation
- Metering air control valves timing adjustable from 5 to 60 seconds
- Dual 3/4" hose outlets include vacuum breakers
- Vandal resistant stainless steel access panel
- Heavy duty, 304 stainless steel polished to a satin finish

SUGGESTED SPECIFICATIONS

Pet fountain shall be Murdock model M-PM54, dual hose connection with hose holder.

Valves shall be internally mounted metering valves, pushbutton operated and requires less than 5 pounds of force to activate. Timing can be adjusted from 5 to 60 seconds.

Unit shall be constructed of 14 gage type 304 stainless steel polished to a satin finish. Bottom plate shall be 3/16" thick and include four mounting holes. 1/2" expansion anchor bolts shall be furnished. All other exposed fasteners shall be vandal resistant stainless steel screws.



☐ Standard Model: M-PM54

MODEL:

(Must Specify)

- | | |
|---------------------------------|--------------------------------|
| <input type="checkbox"/> M-PM54 | Satin stainless finish (Shown) |
| <input type="checkbox"/> M-PM55 | Green powder-coat |
| <input type="checkbox"/> M-PM56 | Red powder-coat |
| <input type="checkbox"/> M-PM57 | Blue powder-coat |

Custom color finishes available upon request

OPTIONS

(additional costs may be incurred)

- | | |
|---------------------------------|---|
| <input type="checkbox"/> - FRU2 | Underground freeze-resistant valve ¹ |
| <input type="checkbox"/> - IAP | In-ground anchor plate ¹ |
| <input type="checkbox"/> - LOGO | Customer Specified logo ¹ |

Options Notes:

¹ See separate option sheet.

Complies with the
following standards:



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • www.murdockmfg.com


Member of
MORRIS GROUP
INTERNATIONAL

* Valve specifications:
Minimum/Maximum Pressure
30 to 100 psi.

Pet Fountain Series

MODEL M-PM54

**PET FOUNTAIN WITH DUAL HOSE BIBB
AND HOSE HOLDER**

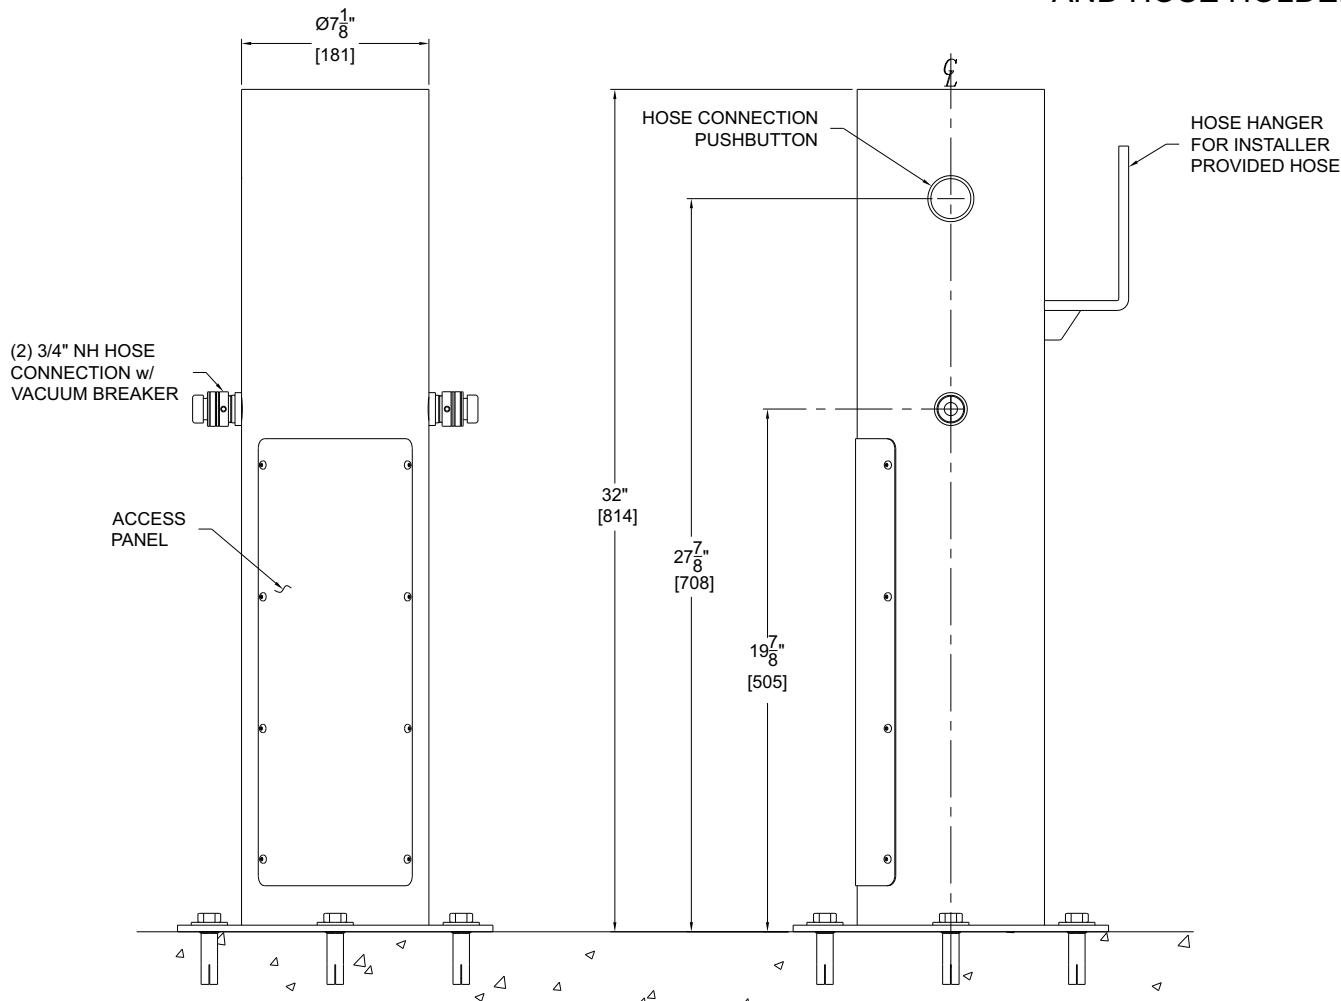

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM].

**SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING**

Model Number & Options _____ Quantity _____

Company _____

Contact _____ Title _____

Signature (Approval for Manufacturing) _____ Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock® Mfg., Member of Morris Group International®, Please visit www.murdockmfg.com for most current specifications.