

PET SERIES

Pet Fountain Series

MODEL M-PM74 DUAL STATION PET FOUNTAIN

STANDARD FEATURES

- 100 mesh inlet strainer
- Pushbutton requiring less than 5 pounds for activation
- Stainless steel, anti-rotation, non-squirt bubblers
- Vandal resistant stainless steel access panel
- 18 gage, 304 stainless steel basins
- Heavy duty, 304 stainless steel polished to a satin finish



Dual pet fountain shall be Murdock model M-PM74. Model shall include two pet fountains. Pet fountain pushbuttons shall be self-closing requiring less than 5 pounds of force to activate the internally mounted

Bubbler shall be stainless steel with a non-squirt feature and operate on a water pressure range of 20-105 psig.

Unit shall be constructed of 14 gage type 304 stainless steel polished to a satin finish with 18 gage pet fountain bowls. Bottom plate shall be 3/16" thick and include two mounting holes with four additional mounting holes for pet fountains. 1/2" expansion anchor bolts are furnished. All other exposed fasteners shall be vandal resistant stainless steel screws.



☐ Standard Model: M-PM74

MODEL:

(Must Specify)

☐ M-PM74 Satin stainless finish (Shown)

☐ M-PM75 Green powder-coated ☐ M-PM76 Red powder-coated

□ M-PM77 Blue powder-coated

Custom color finishes available upon request

OPTIONS

(additional costs may be incurred)

☐ - FRU2 Underground freeze-resistant valve 1

□I - IAP In-ground anchor plate 1

□ - LOGO Customer Specified logo 1

Options Notes:

¹ See separate option sheet.

Complies with the following C standards:







Product Warranty

▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • www.murdockmfg.com






PET SERIES

Pet Fountain Series

* Valve specifications: Minimum/Maximum Pressure 30 to 100 psi. MODEL M-PM74
DUAL STATION
PET FOUNTAIN

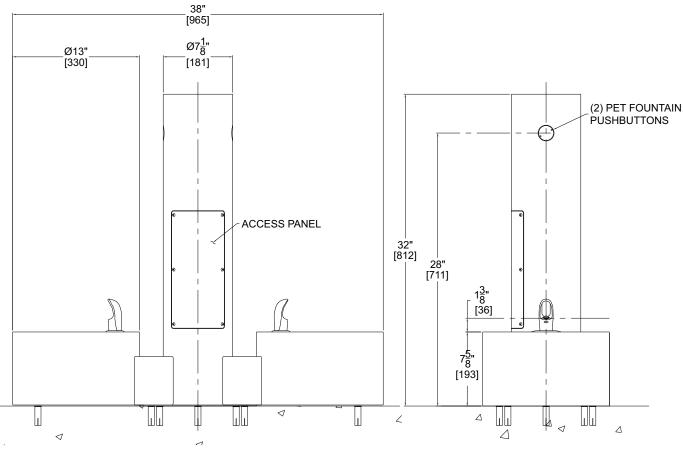

NOTES

1. ALL DIMENSIONS ARE IN INCHES [MM].

MMARY FOR RING	Model Number & Options	Quantity	All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock ⁸
SAL	Company		assumes no responsibility for use of void or superseded data. Dimensions
PPRC	Contact	_Title	may change with the addition of optional accessories. Murdock® Mfg., Member of Morris Group International®.
SELECTION SUMMA & APPROVAL FOR MANUFACTURING	Signature (Approval for Manufacturing)		Please visit www.murdockmfg.com for most current specifications.

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • www.murdockmfg.com

Member of MORRIS GROUP