



PET FOUNTAINS

Pet Fountain Series

MODEL M-PM74

DUAL STATION PET FOUNTAIN

STANDARD FEATURES

- 100 mesh inlet strainer
- Pushbutton requiring less than 5 pounds for activation
- Stainless steel, anti-rotation, non-squirt bubblers
- Vandal resistant stainless steel access panel
- 18 gage, 304 stainless steel basins
- Heavy duty, 304 stainless steel polished to a satin finish

SUGGESTED SPECIFICATIONS

Dual pet fountain shall be Murdock model M-PM74. Model shall include two pet fountains. Pet fountain pushbuttons shall be self-closing requiring less than 5 pounds of force to activate the internally mounted valves.

Bubbler shall be stainless steel with a non-squirt feature and operate on a water pressure range of 20-105 psig.

Unit shall be constructed of 14 gage type 304 stainless steel polished to a satin finish with 18 gage pet fountain bowls. Bottom plate shall be 3/16" thick and include two mounting holes with four additional mounting holes for pet fountains. 1/2" expansion anchor bolts are furnished. All other exposed fasteners shall be vandal resistant stainless steel screws.



Standard Model: M-PM74

MODEL: *(Must Specify)*

- M-PM74 Satin stainless finish (Shown)
- M-PM75 Green powder-coated
- M-PM76 Red powder-coated
- M-PM77 Blue powder-coated

Custom color finishes available upon request

OPTIONS

(additional costs may be incurred)

- FRU2 Underground freeze-resistant valve ¹
- IAP In-ground anchor plate ¹
- LOGO Customer Specified logo ¹

Options Notes:

¹ See separate option sheet.

Complies with the following standards:



Member of
U.S. Green
Building
Council



Recyclable
Product

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of
MORRIS GROUP
INTERNATIONAL




PET FOUNTAINS

Pet Fountain Series

MODEL M-PM74
DUAL STATION
PET FOUNTAIN

* Valve specifications:
 Minimum/Maximum Pressure
 30 to 100 psi.

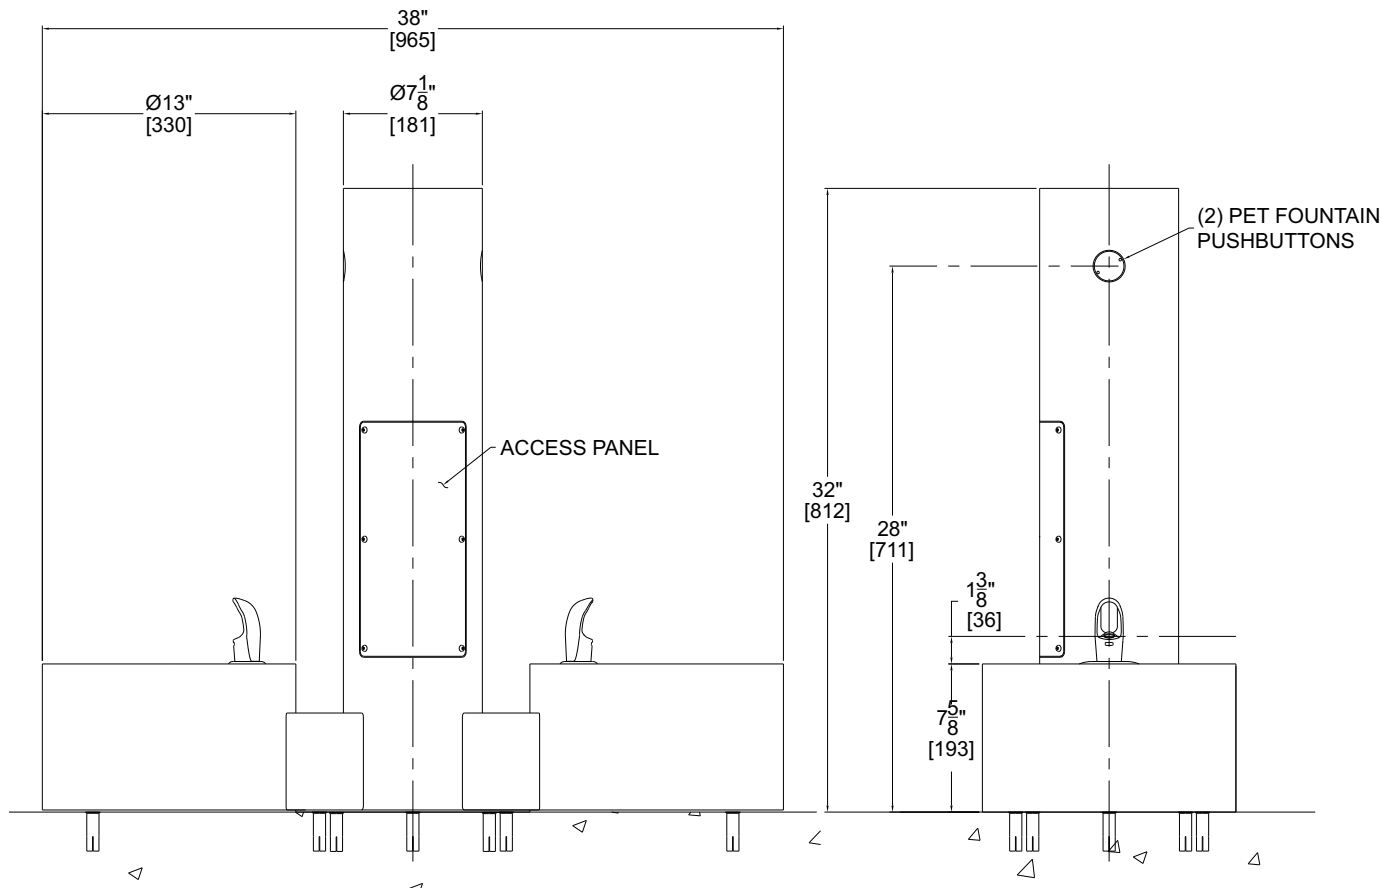

NOTES:
 1. ALL DIMENSIONS ARE IN INCHES [MM].

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

| | | | |
|---|--|----------------|--|
| SELECTION SUMMARY & APPROVAL FOR MANUFACTURING | Model Number & Options _____ | Quantity _____ | <p><small>All dimensions are subject to manufactures tolerance of plus or minus 1/2" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.murdockmfg.com for most current specifications.</small></p> |
| | Company _____ | | |
| | Contact _____ | Title _____ | |
| | Signature (Approval for Manufacturing) _____ | Date _____ | |

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
 Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of
MORRIS GROUP
 INTERNATIONAL