



# HYDRANTS

## Hydrant Option

### OPTION - BFH


#### DOUBLE-BALL CHECK VALVE

#### STANDARD FEATURES


Option - BFH includes a double-ball check valve located at the drain connection of the hydrant to prevent backflow into the hydrant when the water in the hydrant is drained after operation. Option includes an air vent line extending 9" above ground and a permanently mounted vacuum breaker.

Option - BFH is available factory installed on post hydrants. Option is shown installed on a M-75 3/4" hydrant. Option as installed on other size hydrants will be similar in function.

Solid brass castings conform to ASTM standards B61 and B62. Lead-free castings are used in all waterways. Check balls are Teflon®.

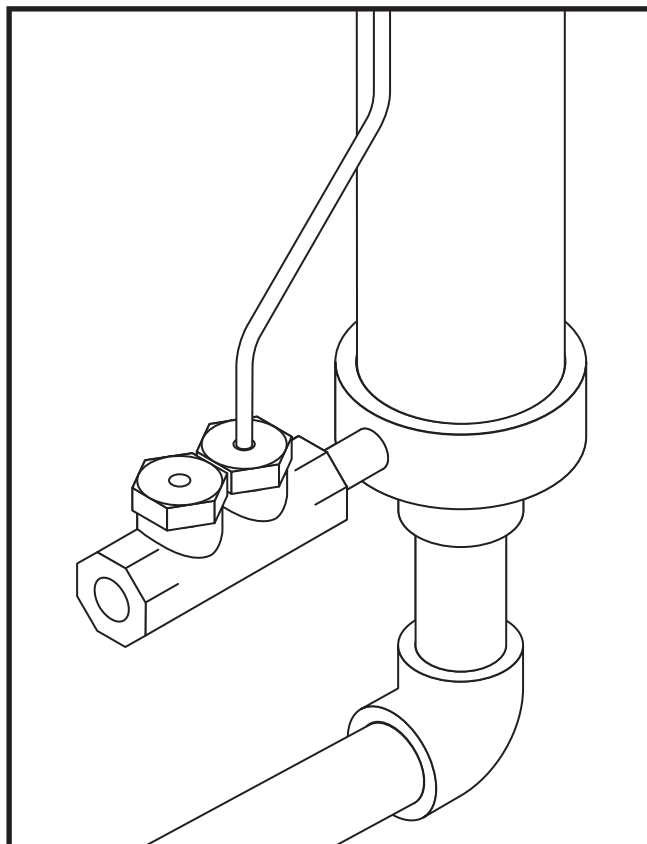

□ Option - BFH

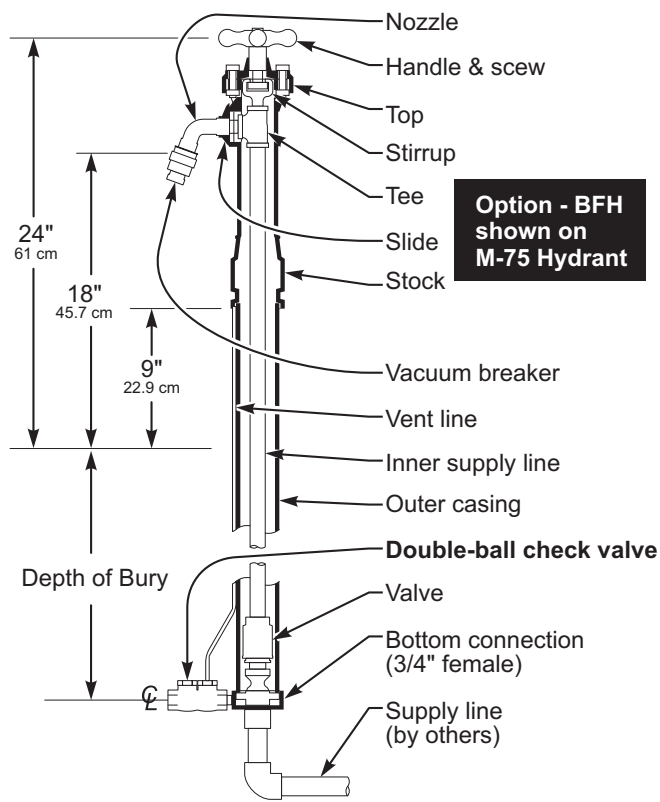

#### SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Numbers & Options \_\_\_\_\_

Quantity \_\_\_\_\_ Date \_\_\_\_\_

Company \_\_\_\_\_

Contact \_\_\_\_\_

Title \_\_\_\_\_

Approval for Manufacturing/Signature \_\_\_\_\_

All dimensions are nominal and subject to manufacturer's change without notice. Murdock-Super Secur assumes no responsibility for use of void or suspended data. © Copyright 2007, Murdock-Super Secur, a division of Acorn Engineering Company.

Please visit [www.murdock-supersecur.com](http://www.murdock-supersecur.com) for most current specifications.

**ONE YEAR LIMITED WARRANTY** - Parts are warranted for one (1) year from date of shipment.