

A152.8FG Series

MODEL A152408S-FG

BARRIER FREE, 14 GAUGE STAINLESS STEEL
BI-LEVEL, WALL MOUNTED
DRINKING FOUNTAIN WITH 32" TRIM PANEL

STANDARD FEATURES

- Child Or Adult Ada Compliant (When Properly Installed)
- 14 Gauge, 304 Stainless Steel
- Polished Stainless Steel, Anti-rotation, Non-squirt Bubblers
- 100-mesh Inlet Strainer
- Vandal-Resistant Screws
- Mounting Frame (A0000000-MF5)
- 32" Wide Trim Panel And Louvered Grille

SUGGESTED SPECIFICATIONS

Model A152408B-FG is a wall mounted, bi-level pressurized electric drinking fountain that shall deliver a minimum of **8.0 GPH** (30.3 LPH) of water at 50°F (10°C) cooled from 80°F (26.7°C) inlet water and 90°F (32.2°C) ambient. Unit shall be made from **14 gauge, 304 stainless steel** with a brushed finish. Unit shall be activated by self-closing, front pushbuttons, by using less than 5 pounds of force, which activates internally mounted valves with adjustable stream regulators controlling the water flow. Cooling system shall use R-134a refrigerant and be capillary tube regulated. Chiller shall include Factory installed Water Leak Detection Auto Shut-Off Valve. Bubblers shall be polished stainless steel with non-squirt features and operate on a water pressure range of 20-105 PSIG. Unit shall have uniquely designed, contoured bowls with P-traps integral to the unit. Unit shall be listed by Underwriters Laboratories for both the US and Canada and is compliant to the Air Conditioning and Refrigeration Institute Standard 1010. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately. Optional WF3000 PFAS Water Filter shall have 3000 gallon capacity with 3rd Party Certification for Lead, Bacteria, Chlorine, Microplastics, and NSF/ANSI for Cyst and total PFAS reduction.

Model Number	GPH*	Rated Watts	Full Load Amps	Approx. Shipping Weight
A152408S-FG	8.0	390	4.6	130 lbs.

*GPH of 50°F water at 90°F ambient room temperature and 80°F inlet water temperature. Compressor motor operates on 115 Volt / 60 Hz single phase.

Complies with the following standards:



Federal Public Law 111-380 (No Lead)



ANSI/ASHRAE 18



(220V Compressor Only)



Model A152408S-FG Shown

MODEL:

(Must Specify)

"INDOOR USE ONLY"

FLEXIBLE BUBBLER (LOW FLOW)

- ☐ A152208F-FG Bronze Finish
- ☐ A152308F-FG Gold Finish (High Polish)
- ☐ A152408F-FG Satin stainless Finish

LEAD-FREE STAINLESS STEEL BUBBLER

- ☐ A152208S-FG Bronze Finish
- ☐ A152308S-FG Gold Finish (High Polish)
- ☐ A152408S-FG Satin stainless Finish (Shown)

OPTIONS

(additional costs may be incurred)

- ☐ -HP High Polished Stainless Steel
- ☐ -RBL Reverse Bi-Level Mounting Frame (A0000000-MF5-RBL)
- ☐ -220V 220 volt / 50 Hz Compressor (€€)

ACCESSORIES

(additional costs may be incurred)

- ☐ -SK2-18 Skirt Kit, Stainless Steel, for Upper Unit¹
- ☐ -WF3000 3000-gallon PFAS Water Filter¹
NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics

NOTE:

1 - Refer to Supplemental Submittal Sheets for Details

[3000 Gallon PFAS Filter Certifications](#)




[Product Warranty](#)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

A152.8FG Series

MODEL A152408S-FG

BARRIER FREE, BI-LEVEL, WALL
MOUNTED 14 GAUGE DRINKING
FOUNTAIN WITH 32" TRIM PANEL

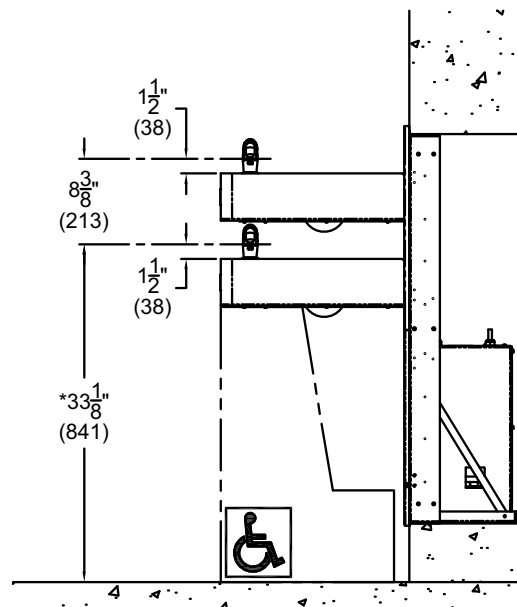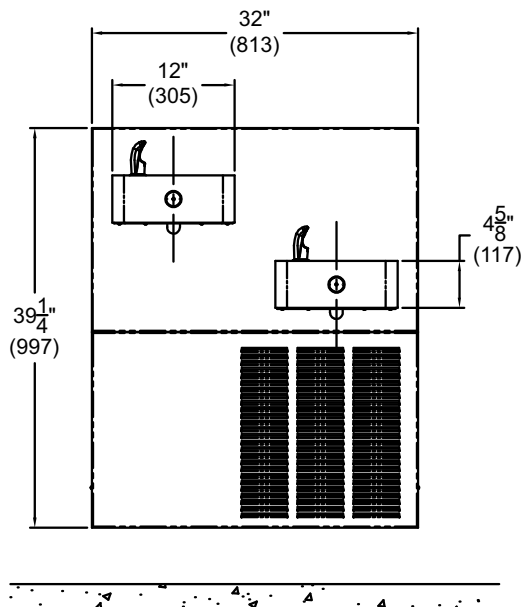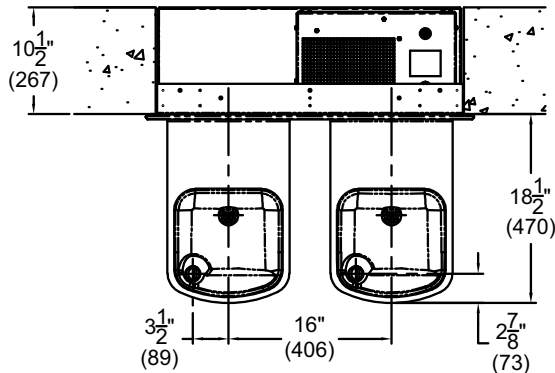

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES (MM).
- *2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPLY WITH FEDERAL, STATE, & LOCAL CODES.
3. WATER FROM CHILLER TO FOUNTAIN SHOULD BE COVERED WITH A SPONGE FOAM RUBBER OR ICE WATER TYPE INSULATION OF ADEQUATE THICKNESS.

SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock® Mfg., Member of Morris Group International®. Please visit www.murdockmfg.com for most current specifications.