

Shower Series

MODEL M-PCMST84 MISTING COLUMN

STANDARD FEATURES

- Pushbutton requiring less than 5 pounds for activation
- Adjustable timing, from 5 to 60 seconds
- Misting Column provides 0.18 gpm
- Vandal resistant fasteners
- Shut off valve for easy servicing
- Heavy duty, 14 gage, 304 stainless steel construction with corrosion and scratch resistant satin finish

SUGGESTED SPECIFICATIONS

Column style mister shall be Murdock model M-PCMST84, eight nozzle mister. Unit is to be pre-piped and hydrostatically tested.

Valve shall have internally mounted metering valve, pushbutton operated and requiring less than 5 pounds of force to activate. Timing shall be adjusted from 5 to 60 seconds.

Misting column nozzles shall be brass and fixture provides 0.18 gpm.

Unit shall be constructed of heavy duty 14 gage type 304 stainless steel polished to a satin finish with vandal resistant fasteners and shall include a 1/4" thick stainless steel Anchor Plate, providing secure mounting for shower.

MODEL:

(Must Specify)

- | | |
|------------------------------------|--------------------------------|
| <input type="checkbox"/> M-PCMST84 | Satin Stainless Finish (Shown) |
| <input type="checkbox"/> M-PCMST85 | Green Powder-Coated |
| <input type="checkbox"/> M-PCMST86 | Red Powder-Coated |
| <input type="checkbox"/> M-PCMST87 | Blue Powder-Coated |

Custom color finishes available upon request



⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Please visit www.murdockmfg.com
for most current specifications.



Model M-PCMST84 shown

OPTIONS

(additional costs may be incurred)

- FRU1 Underground freeze-resistant valve for one pushbutton (-IAP Option Required)¹
- HB1 Hose bibb, compression with hose thread outlet outlet VB^{1 2}
- HB2 Hose bibb, loose key with hose outlet thread VB^{1 2}
- HB3 Hose bibb, loose key, vandal resistant with hose outlet thread VB^{1 2}
- IAP In-ground anchor plate (Required with -FRU Option, replaces standard Anchor Plate)¹
- LOGO Customer specified logo¹




Options Notes:

¹ See separate option sheet.

² The Hose Bibb option is not available or included with the FRU freeze-resistant components.

Shower Series

**MODEL M-PCMST8
MISTING COLUMN**

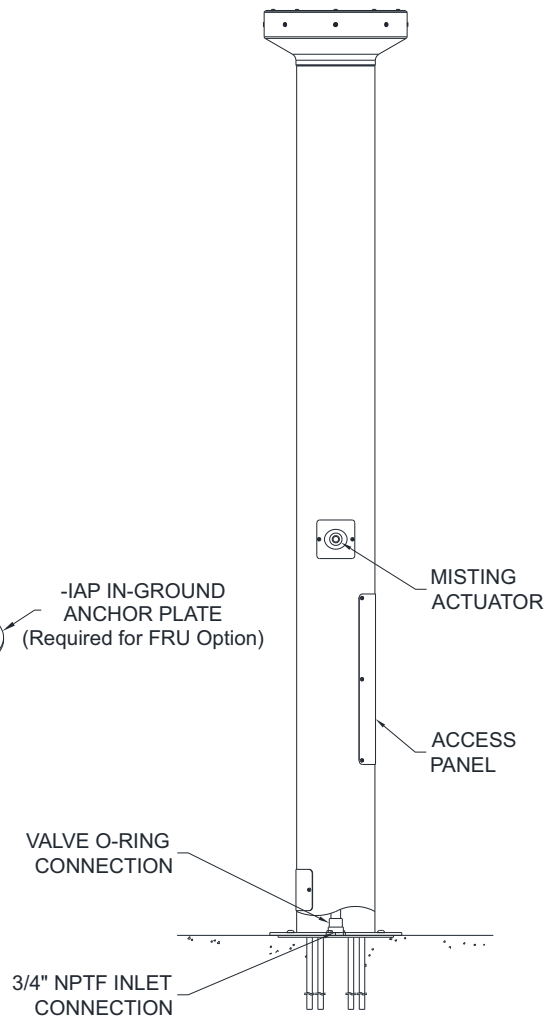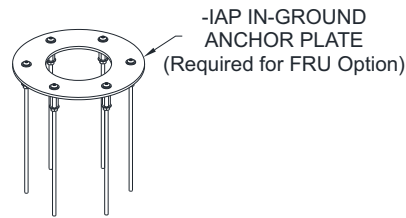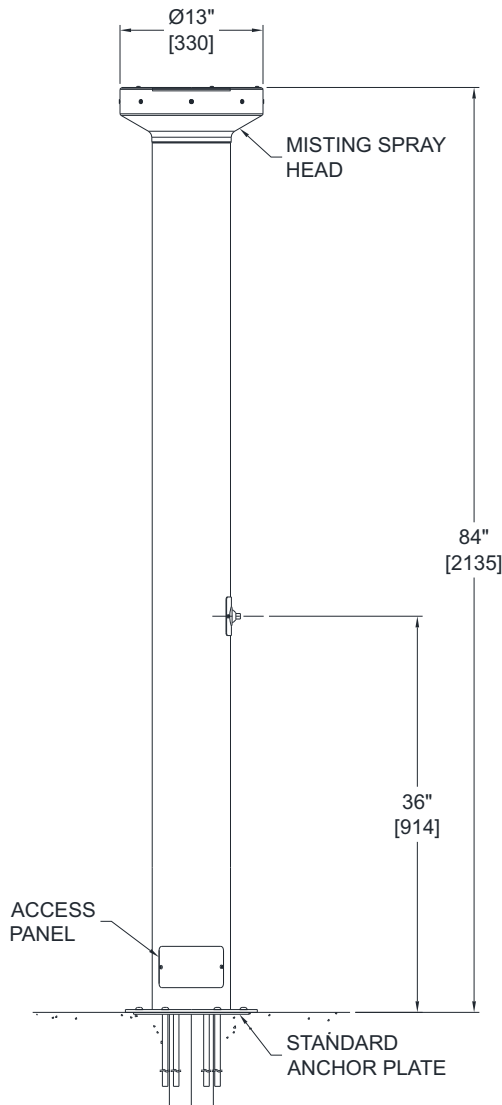

GENERAL NOTES:
1. ALL DIMENSIONS ARE IN INCHES [MM].

SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock[®] assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock[®] Mfg., Member of Morris Group International[®]. Please visit www.murdockmfg.com for most current specifications.