

ECO-BF Series

ECONOMY MODEL OUTDOOR BOTTLE FILLER

STANDARD FEATURES

- Hand Operation is Standard
- Optional Foot Button for Dual Hand/Foot Control
- All Stainless Steel Construction
- Bottle Filler Meets ADA Side Reach Requirements
- Stainless Steel Construction
- Laminar Flow Bottle Filler Spout
- 100 Mesh Inlet Strainer

SUGGESTED SPECIFICATIONS

Model ECO-BF Bottle Filler shall be pushbutton operated requiring less than 5 pounds of force to activate an internally mounted self closing valve. *(Foot Button for dual operation is optionally available.)* Bottle Filler shall include Laminar Flow Spout with an Adjustable Stream Regulator to control the water flow. Flow rate for Bottle Filler shall be 0.5 GPM. Housing and Pedestal shall be 18 gauge type 304 stainless steel with all exposed surfaces polished to a #4 satin finish. Pedestal base shall include concealed bolt holes for securing unit to floor. Bottle Filler shall include Drain Grate with 7/8" O.D. flexible waste hose for trench drain waste (below grade). Provide stainless steel Access Panels to service and install unit with vandal-resistant, stainless steel fasteners. Side Access Panel shall include a Cylinder Lock vandal resistance and ease of removal. Unit shall contain a 100 mesh inlet strainer. Unit shall be certified to meet NSF/ANSI 61, Section 9, Public Law 111-380 (No-Lead) and CHSC 116875. Bottle Filler shall meet ADA side reach requirements when located appropriately.



Model ECO-BF-F

Model ECO-BF

MODEL: *(Must Specify)*

- ECO-BF Pushbutton Operated Bottle Filler (Std)
- ECO-BF-F Foot Button Operated Bottle Filler
(In addition to Pushbutton Operation)

OPTIONAL ACCESSORIES

(additional costs may be incurred)

- EG Enviro-Glaze[®]
Color: _____
Refer to link for color selections
<https://www.murdockmfg.com/enviro-glaze>
- WF1 1500-Gallon Capacity, NSF 42+53,
1-Micron Lead Reduction Filter¹

Complies with the following standards:




NSF/ANSI/CAN 61

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov


ECO-BF Series

**ECONOMY MODEL
OUTDOOR BOTTLE FILLER**

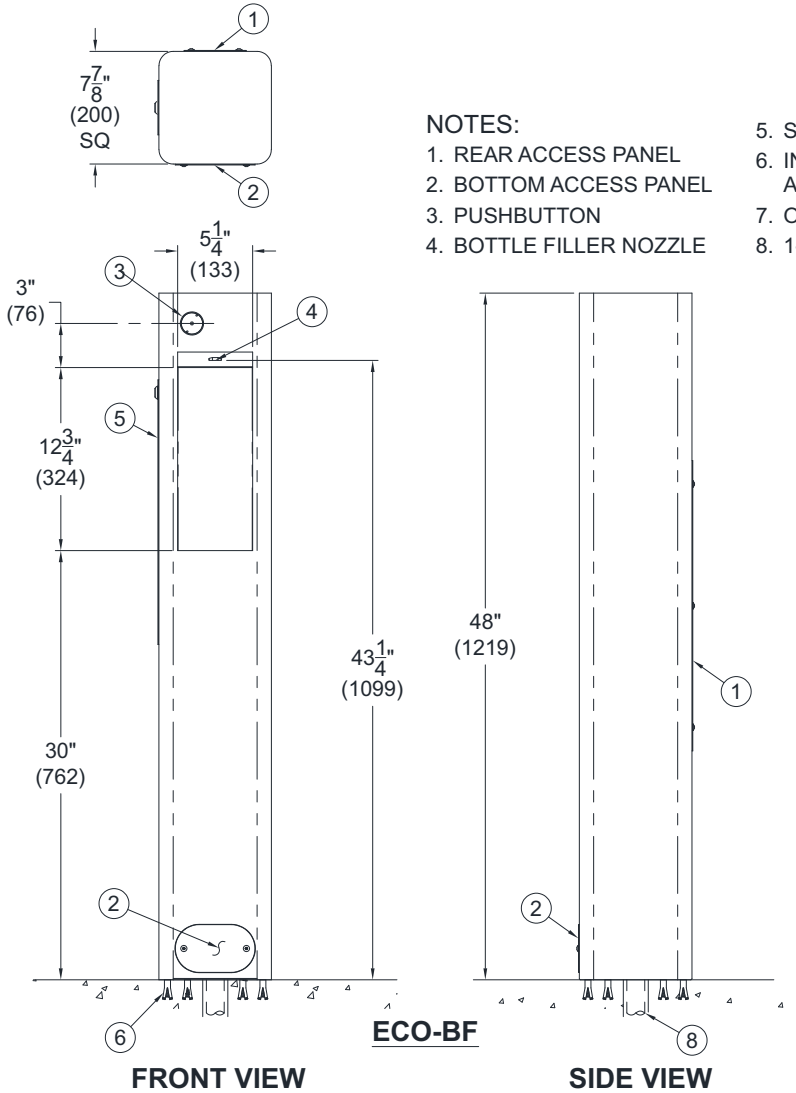

NOTES:

1. REAR ACCESS PANEL
2. BOTTOM ACCESS PANEL
3. PUSHBUTTON
4. BOTTLE FILLER NOZZLE
5. SIDE ACCESS PANEL WITH CYLINDER LOCK
6. INSTALLER PROVIDED FLOOR ANCHORS AND ANCHORING HARDWARE
7. OPTIONAL -F FOOT OPERATED BUTTON
8. 1-1/4" O.D. WASTE TUBE, BY OTHERS

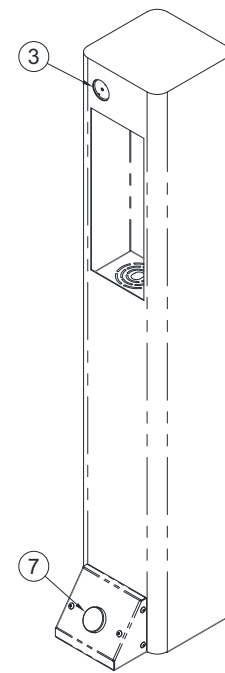

ECO-BF-F

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES (MM)
2. SUPPLY STOP VALVE NOT PROVIDED

* Valve specifications:
Minimum/Maximum Pressure
30 to 100 psi.

**SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING**

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock[®] assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock[®] Mfg., Member of Morris Group International[®]. Please visit www.murdockmfg.com for most current specifications.